

### Overview



#### Ultra flexible - with the universal SITRANS TR200 transmitter

- Two-wire devices for 4 to 20 mA
- Enclosure for rail mounting
- Universal input for virtually any type of temperature sensor
- Configurable over PC

### Benefits

- Compact design
- Electrically isolated
- Test sockets for multimeters
- Diagnostics LED (green/red)
- Sensor monitoring open circuits and short-circuits
- Self-monitoring
- Configuration status stored in EEPROM
- Expanded diagnostic functions, such as slave pointer, operating hours counter, etc.
- Special characteristic
- Electromagnetic compatibility to EN 61326 and NE21
- SIL2 (with Order Code C20), SIL2/3 (with C23)

### Application

SITRANS TR200 transmitters can be used in all industrial sectors. Their compact design enables simple mounting on standard DIN rails on-site in protective boxes or in control cabinets. The following sensors/signal sources can be connected over their universal input module:

- Resistance thermometers (2, 3 or 4-wire system)
- Thermocouples
- Resistance-based sensors and DC voltage sources

The output signal is a direct current from 4 to 20 mA in accordance with the sensor characteristic.


Transmitters of the "intrinsically safe" type of protection can be installed within potentially explosive atmospheres. The devices comply with the Directive 94/9/EC (ATEX).

### Function

The SITRANS TR200 is configured over a PC. A USB or RS 232 modem is linked to the output terminals for this purpose. The configuration data can now be edited using the SIPROM T software tool. The configuration data are then permanently stored in the non-volatile memory (EEPROM).

Once the sensors and power supply have been correctly connected, the transmitter outputs a temperature-linear output signal and the diagnostics LED displays a green light. In the case of a sensor short-circuit, the LED flashes red, an internal device fault is indicated by a steady red light.

The test socket can be used to connect an ammeter at any time for monitoring purposes and plausibility checks. The output current can be read without any interruption, or even without opening the current loop.

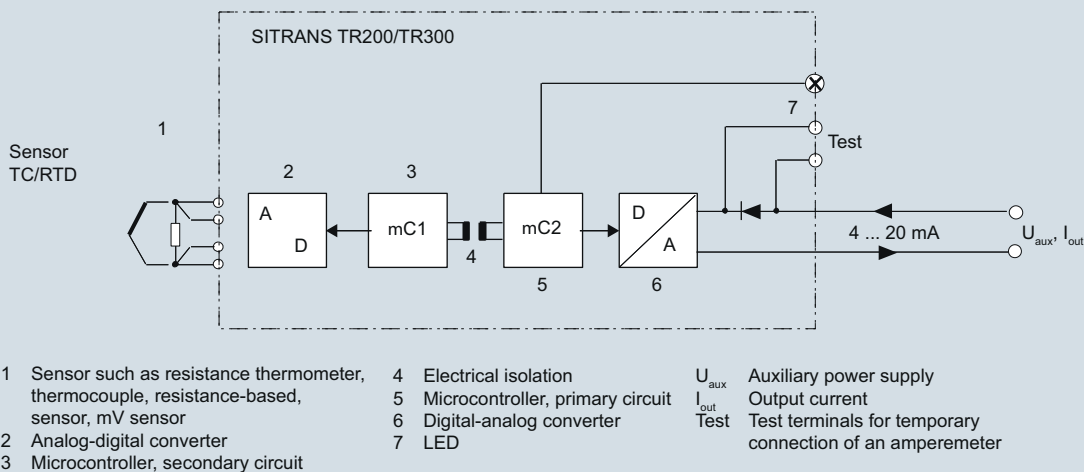

SITRANS TR200 function diagram

# Temperature Measurement

## Transmitters for rail mounting

### SITRANS TR200 two-wire system, universal

#### Technical specifications

<b>Input</b>		<b>Short-circuit monitoring</b>	
<u>Resistance thermometer</u>		can be switched on/off (default value: OFF)	
Measured variable	Temperature	Measuring range	parameterizable max. 0 ... 2200 Ω (see table "Digital measuring errors")
Sensor type		Min. measured span	5 ... 25 Ω (see table "Digital measuring errors")
• to IEC 60751	Pt25 ... 1000	Characteristic curve	Resistance-linear or special characteristic
• to JIS C 1604; $\alpha=0.00392 \text{ K}^{-1}$	Pt25 ... 1000	<u>Thermocouples</u>	
• to IEC 60751	Ni25 ... 1000	Measured variable	Temperature
• Special type	over special characteristic (max. 30 points)	Sensor type (thermocouples)	
Sensor factor	0.25 ... 10 (adaptation of the basic type, e.g. Pt100 to version Pt25 ... 1000)	• Type B	Pt30Rh-Pt6Rh to DIN IEC 584
Units	°C or °F	• Type C	W5 %-Re acc. to ASTM 988
Connection		• Type D	W3 %-Re acc. to ASTM 988
• Standard connection	1 resistance thermometer (RTD) in 2-wire, 3-wire or 4-wire system	• Type E	NiCr-CuNi to DIN IEC 584
• Generation of average value	2 resistance thermometers in 2-wire system for generation of average temperature	• Type J	Fe-CuNi to DIN IEC 584
• Generation of difference	2 resistance thermometers (RTD) in 2-wire system (RTD 1 – RTD 2 or RTD 2 – RTD 1)	• Type K	NiCr-Ni to DIN IEC 584
Interface		• Type L	Fe-CuNi to DIN 43710
• Two-wire system	Parameterizable line resistance $\leq 100 \Omega$ (loop resistance)	• Type N	NiCrSi-NiSi to DIN IEC 584
• Three-wire system	No balancing required	• Type R	Pt13Rh-Pt to DIN IEC 584
• Four-wire system	No balancing required	• Type S	Pt10Rh-Pt to DIN IEC 584
Sensor current	$\leq 0.45 \text{ mA}$	• Type T	Cu-CuNi to DIN IEC 584
Response time $T_{63}$	$\leq 250 \text{ ms}$ for 1 sensor with open-circuit monitoring	• Type U	Cu-CuNi to DIN 43710
Open-circuit monitoring	Always active (cannot be disabled)	Units	°C or °F
Short-circuit monitoring	can be switched on/off (default value: ON)	Connection	
Measuring range	parameterizable (see table "Digital measuring errors")	• Standard connection	1 thermocouple (TC)
Min. measured span	10 °C (18 °F)	• Generation of average value	2 thermocouples (TC)
Characteristic curve	Temperature-linear or special characteristic	• Generation of difference	2 thermocouples (TC) (TC1 – TC2 or TC2 – TC1)
<u>Resistance-based sensors</u>		Response time $T_{63}$	$\leq 250 \text{ ms}$ for 1 sensor with open-circuit monitoring
Measured variable	Actual resistance	Open-circuit monitoring	Can be switched off
Sensor type	Resistance-based, potentiometers	Cold junction compensation	
Units	$\Omega$	• Internal	With integrated Pt100 resistance thermometer
Connection		• External	With external Pt100 IEC 60571 (2-wire or 3-wire connection)
• Normal connection	1 resistance-based sensor (R) in 2-wire, 3-wire or 4-wire system	• External fixed	Cold junction temperature can be set as fixed value
• Generation of average value	2 resistance-based sensors in 2-wire system for generation of average value	Measuring range	parameterizable (see table "Digital measuring errors")
• Generation of difference	2 resistance thermometers in 2-wire system (R1 – R2 or R2 – R1)	Min. measured span	Min. 40 ... 100 °C (72 ... 180 °F) (see table "Digital measuring errors")
Interface		Characteristic curve	Temperature-linear or special characteristic
• Two-wire system	Parameterizable line resistance $\leq 100 \Omega$ (loop resistance)	<u>mV sensor</u>	
• Three-wire system	No balancing required	Measured variable	DC voltage
• Four-wire system	No balancing required	Sensor type	DC voltage source (DC voltage source possible over an externally connected resistor)
Sensor current	$\leq 0.45 \text{ mA}$	Units	mV
Response time $T_{63}$	$\leq 250 \text{ ms}$ for 1 sensor with open-circuit monitoring	Response time $T_{63}$	$\leq 250 \text{ ms}$ for 1 sensor with open-circuit monitoring
Open-circuit monitoring	Always active (cannot be disabled)	Open-circuit monitoring	Can be switched off
		Measuring range	parameterizable max. - 100 ... 1100 mV
		Min. measured span	2 mV or 20 mV
		Overload capability of the input	-1.5 ... +3.5 V DC
		Input resistance	$\geq 1 \text{ M}\Omega$
		Characteristic curve	Voltage-linear or special characteristic

Output	
Output signal	4 ... 20 mA, 2-wire
Auxiliary power	11 ... 35 V DC (to 30 V for Ex i/ic; to 32 V for Ex nA)
Max. load	$(U_{aux} - 11 \text{ V})/0.023 \text{ A}$
Overrange	3.6 ... 23 mA, infinitely adjustable (default range: 3.84 mA ... 20.5 mA)
Error signal (e.g. following sensor fault) (conforming to NE43)	3.6 ... 23 mA, infinitely adjustable (default value: 22.8 mA)
Sample cycle	0.25 s nominal
Damping	Software filter 1st order 0 ... 30 s (parameterizable)
Protection	Against reversed polarity
Electrically isolated	Input against output 2.12 kV DC (1.5 kV <sub>eff</sub> AC)

Measuring accuracy	
Digital measuring errors	See Table "Digital measuring errors"
Reference conditions	
• Auxiliary power	24 V ± 1 %
• Load	500 Ω
• Ambient temperature	23 °C
• Warming-up time	> 5 min
Error in the analog output (digital/analog converter)	< 0.025 % of span
Error due to internal cold junction	< 0.5 °C (0.9 °F)
Influence of ambient temperature	
• Analog measuring error	0.02 % of span/10 °C (18 °F)
• Digital measuring errors	
- With resistance thermometer	0.06 °C (0.11 °F)/10 °C (18 °F)
- with thermocouples	0.6 °C (1.1 °F)/10 °C (18 °F)
Auxiliary power effect	< 0.001 % of span/V
Effect of load impedance	< 0.002 % of span/100 Ω
Long-term drift	
• In the first month	< 0.02 % of span in the first month
• After one year	< 0.2 % of span after one year
• After 5 years	< 0.3 % of span after 5 years

Conditions of use	
<u>Ambient conditions</u>	
Ambient temperature range	-40 ... +85 °C (-40 ... +185 °F)
Storage temperature range	-40 ... +85 °C (-40 ... +185 °F)
Relative humidity	< 98 %, with condensation
Electromagnetic compatibility	acc. to EN 61326 and NE21

Construction	
Material	Plastic, electronic module potted
Weight	122 g
Dimensions	See "Dimensional drawings"
Cross-section of cables	Max. 2.5 mm <sup>2</sup> (AWG 13)
Degree of protection to IEC 60529	
• Enclosure	IP20

Certificates and approvals	
Explosion protection ATEX	
EC type test certificate	PTB 07 ATEX 2032X
• "Intrinsic safety" type of protection	II 2(1) G Ex ia/ib IIC T6/T4 II 3(1) G Ex ia/ic IIC T6/T4 II 3 G Ex ic IIC T6/T4 II 2(1) D Ex iaD/ibD 20/21 T115 °C
• Type of protection, "equipment is non-arcing"	II 3 G Ex nA IIC T6/T4
Other certificates	NEPSI
Software requirements for SIPROM T	
PC operating system	Windows ME, 2000, XP, Win 7 and Win 8; can also be used in connection with RS 232 modem under Windows 95, 98 and 98SE

### Factory setting:

- Pt100 (IEC 751) with 3-wire circuit
- Measuring range: 0 ... 100 °C (32 ... 212 °F)
- Error signal in the event of sensor breakage: 22.8 mA
- Sensor offset: 0 °C (0 °F)
- Damping 0.0 s

### Digital measuring errors

#### Resistance thermometer

Input	Measuring range °C/(°F)	Min. measured span		Digital accuracy	
		°C	(°F)	°C	(°F)
<b>to IEC 60751</b>					
Pt25	-200 ... +850 (-328 ... +1562)	10	(18)	0.3	(0.54)
Pt50	-200 ... +850 (-328 ... +1562)	10	(18)	0.15	(0.27)
Pt100 ... Pt200	-200 ... +850 (-328 ... +1562)	10	(18)	0.1	(0.18)
Pt500	-200 ... +850 (-328 ... +1562)	10	(18)	0.15	(0.27)
Pt1000	-200 ... +350 (-328 ... +662)	10	(18)	0.15	(0.27)
<b>to JIS C1604-81</b>					
Pt25	-200 ... +649 (-328 ... +1200)	10	(18)	0.3	(0.54)
Pt50	-200 ... +649 (-328 ... +1200)	10	(18)	0.15	(0.27)
Pt100 ... Pt200	-200 ... +649 (-328 ... +1200)	10	(18)	0.1	(0.18)
Pt500	-200 ... +649 (-328 ... +1200)	10	(18)	0.15	(0.27)
Pt1000	-200 ... +350 (-328 ... +662)	10	(18)	0.15	(0.27)
Ni 25 to Ni1000	-60 ... +250 (-76 ... +482)	10	(18)	0.1	(0.18)

## Temperature Measurement

### Transmitters for rail mounting

#### SITRANS TR200 two-wire system, universal

##### Resistance-based sensors

Input	Measuring range	Min. mea- sured span	Digital accuracy
	$\Omega$	$\Omega$	$\Omega$
Resistance	0 ... 390	5	0.05
Resistance	0 ... 2200	25	0.25

##### Thermocouples

Input	Measuring range	Min. mea- sured span		Digital accuracy	
		$^{\circ}\text{C}$	$(^{\circ}\text{F})$	$^{\circ}\text{C}$	$(^{\circ}\text{F})$
Type B	0 ... 1820 (32 ... 3308)	100	(180)	2 <sup>1)</sup>	(3.6) <sup>1)</sup>
Type C (W5)	0 ... 2300 (32 ... 4172)	100	(180)	2	(3.6)
Type D (W3)	0 ... 2300 (32 ... 4172)	100	(180)	1 <sup>2)</sup>	(1.8) <sup>2)</sup>
Type E	-200 ... +1000 (-328 ... +1832)	50	(90)	1	(1.8)
Type J	-210 ... +1200 (-346 ... +2192)	50	(90)	1	(1.8)
Type K	-230 ... +1370 (-382 ... +2498)	50	(90)	1	(1.8)
Type L	-200 ... +900 (-328 ... +1652)	50	(90)	1	(1.8)
Type N	-200 ... +1300 (-328 ... +2372)	50	(90)	1	(1.8)
Type R	-50 ... +1760 (-58 ... +3200)	100	(180)	2	(3.6)
Type S	-50 ... +1760 (-58 ... +3200)	100	(180)	2	(3.6)
Type T	-200 ... +400 (-328 ... +752)	40	(72)	1	(1.8)
Type U	-200 ... +600 (-328 ... +1112)	50	(90)	2	(3.6)

<sup>1)</sup> The digital accuracy in the range 0 to 300 °C (32 to 572 °F) is 3 °C (5.4 °F).

<sup>2)</sup> The digital accuracy in the range 1750 to 2300 °C (3182 to 4172 °F) is 2 °C (3.6 °F).

##### mV sensor

Input	Measuring range	Min. measured span	Digital accuracy
	mV	mV	$\mu\text{V}$
mV sensor	-10 ... +70	2	40
mV sensor	-100 ... +1100	20	400

The digital accuracy is the accuracy after the analog/digital conversion including linearization and calculation of the measured value.

An additional error is generated in the output current 4 to 20 mA as a result of the digital/analog conversion of 0.025 % of the set span (digital-analog error).

The total error under reference conditions at the analog output is the sum from the digital error and the digital-analog error (poss. with the addition of cold junction errors in the case of thermocouple measurements).

## Temperature Measurement Transmitters for rail mounting

### SITRANS TR200 two-wire system, universal

Selection and Ordering data	Article No.
<b>Temperature transmitter SITRANS TR200</b>	
For mounting on a standard DIN rail, two-wire system, 4 to 20 mA, programmable, with electrical isolation, with documentation on MiniDVD	
<ul style="list-style-type: none"> <li>Without explosion protection ▶ ◆ <b>7NG3032-0JN00</b></li> <li>With explosion protection to ATEX ▶ ◆ <b>7NG3032-1JN00</b></li> </ul>	
<b>Further designs</b>	Order code
Please add <b>"-Z"</b> to Article No. with and specify Order codes(s).	
With test protocol (5 measuring points)	<b>C11</b>
Functional safety SIL2	<b>C20</b>
Functional safety SIL2/3	<b>C23</b>
<b>Customer-specific programming</b>	
Add <b>"-Z"</b> to Article No. and specify Order code(s)	
Measuring range to be set Specify in plain text (max. 5 digits): Y01: ... to ... °C, °F	<b>Y01<sup>1)</sup></b>
Measuring point no. (TAG), max. 8 characters	<b>Y17<sup>2)</sup></b>
Measuring point descriptor, max. 16 characters	<b>Y23<sup>2)</sup></b>
Measuring point message, max. 32 characters	<b>Y24<sup>2)</sup></b>
Text on front label, max. 16 characters	<b>Y29<sup>2)3)</sup></b>
Pt100 (IEC) 2-wire, $R_L = 0 \Omega$	<b>U02<sup>4)</sup></b>
Pt100 (IEC) 3-wire	<b>U03<sup>4)</sup></b>
Pt100 (IEC) 4-wire	<b>U04<sup>4)</sup></b>
Thermocouple type B	<b>U20<sup>4)5)</sup></b>
Thermocouple type C (W5)	<b>U21<sup>4)5)</sup></b>
Thermocouple type D (W3)	<b>U22<sup>4)5)</sup></b>
Thermocouple type E	<b>U23<sup>4)5)</sup></b>
Thermocouple type J	<b>U24<sup>4)5)</sup></b>
Thermocouple type K	<b>U25<sup>4)5)</sup></b>
Thermocouple type L	<b>U26<sup>4)5)</sup></b>
Thermocouple type N	<b>U27<sup>4)5)</sup></b>
Thermocouple type R	<b>U28<sup>4)5)</sup></b>
Thermocouple type S	<b>U29<sup>4)5)</sup></b>
Thermocouple type T	<b>U30<sup>4)5)</sup></b>
Thermocouple type U	<b>U31<sup>4)5)</sup></b>
With TC: CJC external (Pt100, 3-wire)	<b>U41</b>
With TC: CJC external with fixed value, specify in plain text	<b>Y50</b>
Special differing customer-specific programming, specify in plain text	<b>Y09<sup>6)</sup></b>
Fail-safe value 3.6 mA (instead of 22.8 mA)	<b>U36<sup>2)</sup></b>

Accessories	Article No.
<b>Modem for SITRANS TH100, TH200, TR200 and TF with TH200 incl. SIPROM T parameterization software</b> With USB connection	<b>7NG3092-8KU</b>
<b>MiniDVD for temperature measuring instruments for</b>	<b>A5E00364512</b>
With documentation in German, English, French, Spanish, Italian, Portuguese and SIPROM T parameterization software	

▶ Available ex stock.

◆ We can offer shorter delivery times for configurations designated with the Quick Ship Symbol ◆. For details see page 9/5 in the appendix.

- For customer-specific programming for RTD and TC, the start value and the end value of the required measuring span must be specified here.
- For this selection, Y01 or Y09 must also be selected.
- Text on front plate is not saved in the device.
- For this selection, Y01 must also be selected.
- Internal cold junction compensation is selected as the default for TC.
- For customer-specific programming, for example mV and ohm, the start value and the end value of the required measuring span and the unit must be entered here.

Supply units see Chapter "Supplementary Components".

#### Ordering example 1:

7NG3032-0JN00-Z Y01+Y17+Y29+U03  
Y01: -10 ... +100 °C  
Y17: TICA123  
Y29: TICA123

#### Ordering example 2:

7NG3032-0JN00-Z Y01+Y17+Y23+Y29+U25  
Y01: -10 ... +100 °C  
Y17: TICA123  
Y23: TICA123HEAT  
Y29: TICA123HEAT

#### Factory setting:


- Pt100 (IEC 751) with 3-wire circuit
- Measuring range: 0 ... 100 °C (32 ... 212 °F)
- Fault current: 22.8 mA
- Sensor offset: 0 °C (0 °F)
- Damping 0.0 s

## Temperature Measurement

Transmitters for rail mounting


SITRANS TR200 two-wire system, universal

### Dimensional drawings

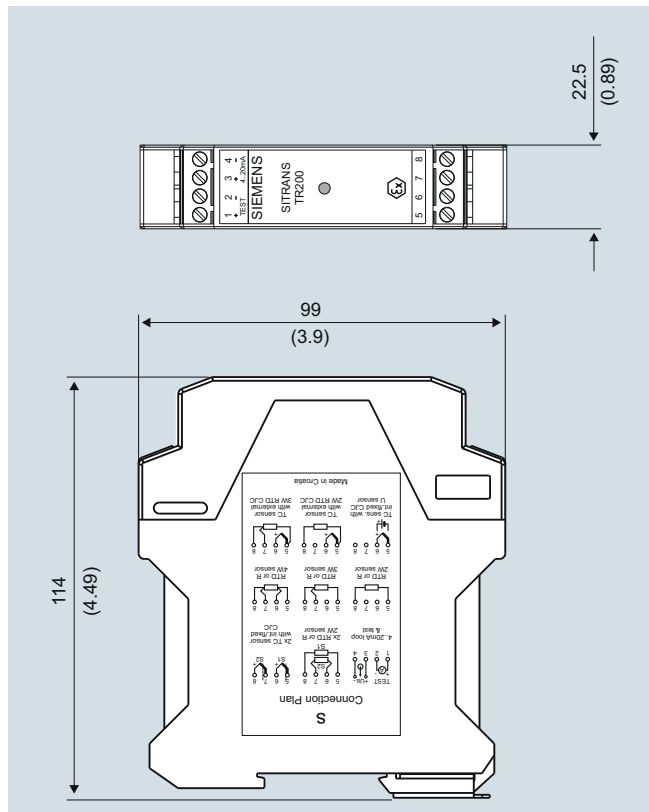

SITRANS TR200, dimensions in mm (inch)

### Schematics

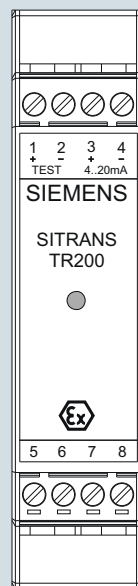


#### Assignments


- 1 (+) and 2 (-) Test terminals (test) for measurement of the output current with a multimeter
- 3 (+) and 4 (-) Power supply  $U_{\text{aux}}$ , output current  $I_{\text{out}}$
- 5, 6, 7 and 8 Sensor assignment, see schematics

SITRANS TR200, pin assignment


#### Resistance thermometer




Two-wire system <sup>1)</sup>



Three-wire system




Four-wire system




Generation of average value/difference <sup>1)</sup>

<sup>1)</sup> Programmable line resistance for the purpose of correction.


#### Resistance




Two-wire system <sup>1)</sup>



Three-wire system




Four-wire system




Generation of average value/difference <sup>1)</sup>


#### Thermocouple




Cold junction compensation internal/fixed value



Cold junction compensation with external Pt100 in two-wire system <sup>1)</sup>




Cold junction compensation with external Pt100 in three-wire system




Generation of average value / difference with internal cold junction compensation


#### Voltage measurement




#### Current measurement



#### Test terminals



#### Power supply/ 4 ... 20 mA (U<sub>aux</sub>)



SITRANS TR200, sensor connection assignment

## Temperature Measurement

### Transmitters for rail mounting

#### SITRANS TR300 two-wire system, universal, HART

##### Overview



##### "HART" to beat - the universal SITRANS TR300 transmitter

- Two-wire devices for 4 to 20 mA, HART
- Device for rail mounting
- Universal input for virtually any type of temperature sensor
- Configurable over HART

##### Benefits

- Compact design
- Electrically isolated
- Test sockets for multimeters
- Diagnostics LED (green/red)
- Sensor monitoring open circuits and short-circuits
- Self-monitoring
- Configuration status stored in EEPROM
- Expanded diagnostic functions, such as slave pointer, operating hours counter, etc.
- Special characteristic
- Electromagnetic compatibility to EN 61326 and NE21
- SIL2 (with Order Code C20), SIL2/3 (with C23)

##### Application

SITRANS TR300 transmitters can be used in all industrial sectors. Their compact design enables simple mounting on standard DIN rails on-site in protective boxes or in control cabinets. The following sensors/signal sources can be connected over their universal input module:

- Resistance thermometers (2, 3 or 4-wire system)
- Thermocouples
- Resistance-based sensors and DC voltage sources

The output signal is a direct current from 4 to 20 mA in accordance with the sensor characteristic, superimposed by the digital HART signal.


Transmitters of the "intrinsically safe" type of protection can be installed within potentially explosive atmospheres. The devices comply with the Directive 94/9/EC (ATEX).

##### Function

The SITRANS TR300 is configured over HART. This can be done using a handheld communicator or even more conveniently with a HART modem and the SIMATIC PDM parameterization software. The configuration data are then permanently stored in the non-volatile memory (EEPROM).

Once the sensors and power supply have been correctly connected, the transmitter outputs a temperature-linear output signal and the diagnostics LED displays a green light. In the case of a sensor short-circuit, the LED flashes red, an internal device fault is indicated by a steady red light.

The test socket can be used to connect an ammeter at any time for monitoring purposes and plausibility checks. The output current can be read without any interruption, or even without opening the current loop.

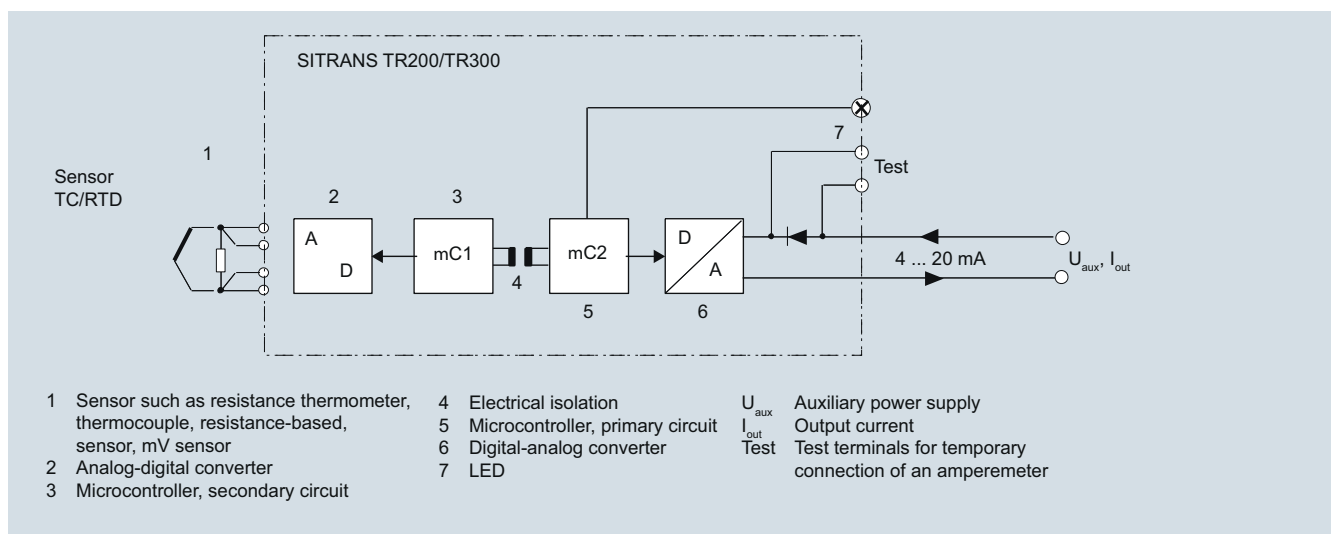

SITRANS TR300 function diagram



### Technical specifications

#### Input

##### Resistance thermometer

Measured variable	Temperature
Sensor type	
• to IEC 60751	Pt25 ... Pt1000
• to JIS C 1604; $\alpha=0.00392 \text{ K}^{-1}$	Pt25 ... Pt1000
• to IEC 60751	Ni25 ... Pt1000
• Special type	over special characteristic (max. 30 points)
Sensor factor	0.25 ... 10 (adaptation of the basic type, e.g. Pt100 to version Pt25 ... 1000)
Units	°C or °F
Connection	
• Standard connection	1 resistance thermometer (RTD) in 2-wire, 3-wire or 4-wire system
• Generation of average value	2 identical resistance thermometers in 2-wire system for generation of average temperature
• Generation of difference	2 identical resistance thermometers (RTD) in 2-wire system (RTD 1 – RTD 2 or RTD 2 – RTD 1)
Interface	
• Two-wire system	Parameterizable line resistance $\leq 100 \Omega$ (loop resistance)
• Three-wire system	No balancing required
• Four-wire system	No balancing required
Sensor current	$\leq 0.45 \text{ mA}$
Response time $T_{63}$	$\leq 250 \text{ ms}$ for 1 sensor with open-circuit monitoring
Open-circuit monitoring	Always active (cannot be disabled)
Short-circuit monitoring	can be switched on/off (default value: ON)
Measuring range	parameterizable (see table "Digital measuring errors")
Min. measured span	10 °C (18 °F)
Characteristic curve	Temperature-linear or special characteristic

##### Resistance-based sensors

Measured variable	Actual resistance
Sensor type	Resistance-based, potentiometers
Units	$\Omega$
Connection	
• Normal connection	1 resistance-based sensor (R) in 2-wire, 3-wire or 4-wire system
• Generation of average value	2 resistance-based sensors in 2-wire system for generation of average value
• Generation of difference	2 resistance thermometers in 2-wire system (R1 – R2 or R2 – R1)
Interface	
• Two-wire system	Parameterizable line resistance $\leq 100 \Omega$ (loop resistance)
• Three-wire system	No balancing required
• Four-wire system	No balancing required
Sensor current	$\leq 0.45 \text{ mA}$

#### Response time $T_{63}$

#### Open-circuit monitoring

#### Short-circuit monitoring

#### Measuring range

#### Min. measured span

#### Characteristic curve

#### Thermocouples

#### Measured variable

#### Sensor type (thermocouples)

- Type B
- Type C
- Type D

- Type E
- Type J
- Type K

- Type L
- Type N
- Type R

- Type S
- Type T
- Type U

#### Units

#### Connection

- Standard connection
- Generation of average value
- Generation of difference

#### Response time $T_{63}$

#### Open-circuit monitoring

#### Cold junction compensation

- Internal

- External

- External fixed

#### Measuring range

#### Min. measured span

#### Characteristic curve

#### mV sensor

#### Measured variable

#### Sensor type

#### Units

#### Response time $T_{63}$

#### Open-circuit monitoring

$\leq 250 \text{ ms}$  for 1 sensor with open-circuit monitoring

Always active (cannot be disabled)

can be switched on/off (default value: OFF)

parameterizable max. 0 ... 2200  $\Omega$  (see table "Digital measuring errors")

5 ... 25  $\Omega$  (see table "Digital measuring errors")

Resistance-linear or special characteristic

Temperature

Pt30Rh-Pt6Rh to DIN IEC 584  
W5 %-Re acc. to ASTM 988  
W3 %-Re acc. to ASTM 988

NiCr-CuNi to DIN IEC 584  
Fe-CuNi to DIN IEC 584  
NiCr-Ni to DIN IEC 584

Fe-CuNi to DIN 43710  
NiCrSi-NiSi to DIN IEC 584  
Pt13Rh-Pt to DIN IEC 584

Pt10Rh-Pt to DIN IEC 584  
Cu-CuNi to DIN IEC 584  
Cu-CuNi to DIN 43710

°C or °F

1 thermocouple (TC)

2 thermocouples (TC)

2 thermocouples (TC) (TC1 – TC2 or TC2 – TC1)

$\leq 250 \text{ ms}$  for 1 sensor with open-circuit monitoring

Can be switched off

With integrated Pt100 resistance thermometer

With external Pt100 IEC 60571 (2-wire or 3-wire connection)

Cold junction temperature can be set as fixed value

parameterizable (see table "Digital measuring errors")

Min. 40 ... 100 °C (72 ... 180 °F) (see table "Digital measuring errors")

Temperature-linear or special characteristic

DC voltage

DC voltage source (DC voltage source possible over an externally connected resistor)

mV

$\leq 250 \text{ ms}$  for 1 sensor with open-circuit monitoring

Can be switched off

## Temperature Measurement

### Transmitters for rail mounting

#### SITRANS TR300 two-wire system, universal, HART

Measuring range	parameterizable max. -100 ... 1100 mV
Min. measured span	2 mV or 20 mV
Overload capability of the input	-1.5 ... +3.5 V DC
Input resistance	≥ 1 MΩ
Characteristic curve	Voltage-linear or special characteristic
<b>Output</b>	
Output signal	4 ... 20 mA, 2-wire with communication acc. to HART Rev. 5.9
Auxiliary power	11 ... 35 V DC (to 30 V for Ex i/ic; to 32 V for Ex nA)
Max. load	(U <sub>aux</sub> - 11 V)/0.023 A
Overrange	3.6 ... 23 mA, infinitely adjustable (default range: 3.84 ... 20.5 mA)
Error signal (e.g. following sensor fault) (conforming to NE43)	3.6 ... 23 mA, infinitely adjustable (default value: 22.8 mA)
Sample cycle	0.25 s nominal
Damping	Software filter 1st order 0 ... 30 s (parameterizable)
Protection	Against reversed polarity
Electrical isolation	Input against output (1 kV <sub>eff</sub> )
<b>Measuring accuracy</b>	
Digital measuring errors	see table "Digital measuring errors"
Reference conditions	
• Auxiliary power	24 V ± 1 %
• Load	500 Ω
• Ambient temperature	23 °C
• Warming-up time	> 5 min
Error in the analog output (digital/analog converter)	< 0.025 % of span
Error due to internal cold junction	< 0.5 °C (0.9 °F)
Ambient temperature effect	
• Analog measuring errors of span	< 0.2 % of max. span/10 °C (18 °F)
• Digital measuring errors	
- at resistance thermometers	0.06 °C (0.11 °F)/10 °C (18 °F)
- at thermocouples	0.6 °C (1.1 °F)/10 °C (18 °F)
Auxiliary power effect	< 0.001 % of span/V
Effect of load impedance	< 0.002 % of span/100 Ω
Long-term drift	
• In the first month	< 0.02 % of span in the first month
• After one year	< 0.2 % of span after one year
• After 5 years	< 0.3 % of span after 5 years
<b>Conditions of use</b>	
<u>Ambient conditions</u>	
Ambient temperature range	-40 ... +85 °C (-40 ... +185 °F)
Storage temperature range	-40 ... +85 °C (-40 ... +185 °F)
Relative humidity	< 98 %, with condensation
Electromagnetic compatibility	acc. to EN 61326 and NE21
<b>Design</b>	
Material	Plastic, electronic module potted
Weight	122 g
Dimensions	See "Dimensional drawings"
Cross-section of cables	Max. 2.5 mm <sup>2</sup> (AWG 13)
Degree of protection to IEC 60529	
• Enclosure	IP20

#### Certificates and approvals

Explosion protection ATEX

EC type test certificate

• "Intrinsic safety" type of protection

• Type of protection, "equipment is non-arcing"

Other certificates

PTB 07 ATEX 2032X

II 2(1) G Ex ia/ib IIC T6/T4

II 3(1) G Ex ia/ic IIC T6/T4

II 3 G Ex ic IIC T6/T4

II 2(1) D Ex iaD/ibD 20/21 T115 °C

II 3 G Ex nA IIC T6/T4

NEPSI

#### Factory setting:

- Pt100 (IEC 751) with 3-wire circuit
- Measuring range: 0 ... 100 °C (32 ... 212 °F)
- Error signal in the event of sensor breakage: 22.8 mA
- Sensor offset: 0 °C (0 °F)
- Damping 0.0 s

### Digital measuring errors

#### Resistance thermometer

Input	Measuring range °C / (°F)	Min. mea- sured span		Digital accuracy	
		°C	(°F)	°C	(°F)
<b>to IEC 60751</b>					
Pt25	-200 ... +850 (-328 ... +1562)	10	(18)	0.3	(0.54)
Pt50	-200 ... +850 (-328 ... +1562)	10	(18)	0.15	(0.27)
Pt100 ... Pt200	-200 ... +850 (-328 ... +1562)	10	(18)	0.1	(0.18)
Pt500	-200 ... +850 (-328 ... +1562)	10	(18)	0.15	(0.27)
Pt1000	-200 ... +350 (-328 ... +662)	10	(18)	0.15	(0.27)
<b>to JIS C1604-81</b>					
Pt25	-200 ... +649 (-328 ... +1200)	10	(18)	0.3	(0.54)
Pt50	-200 ... +649 (-328 ... +1200)	10	(18)	0.15	(0.27)
Pt100 ... Pt200	-200 ... +649 (-328 ... +1200)	10	(18)	0.1	(0.18)
Pt500	-200 ... +649 (-328 ... +1200)	10	(18)	0.15	(0.27)
Pt1000	-200 ... +350 (-328 ... +662)	10	(18)	0.15	(0.27)
Ni 25 to Ni1000	-60 ... +250 (-76 ... +482)	10	(18)	0.1	(0.18)

#### Resistance-based sensors

Input	Measuring range Ω	Min. mea- sured span Ω	Digital accuracy Ω
Resistance	0 ... 2200	25	0.25

#### Thermocouples

Input	Measuring range °C / (°F)	Min. mea- sured span		Digital accuracy	
		°C	(°F)	°C	(°F)
Type B	0 ... 1820 (32 ... 3308)	100	(180)	2 <sup>1)</sup>	(3.6) <sup>1)</sup>
Type C (W5)	0 ... 2300 (32 ... 4172)	100	(180)	2	(3.6)
Type D (W3)	0 ... 2300 (32 ... 4172)	100	(180)	1 <sup>2)</sup>	(1.8) <sup>2)</sup>
Type E	-200 ... +1000 (-328 ... +1832)	50	(90)	1	(1.8)
Type J	-210 ... +1200 (-346 ... +2192)	50	(90)	1	(1.8)
Type K	-230 ... +1370 (-382 ... +2498)	50	(90)	1	(1.8)
Type L	-200 ... +900 (-328 ... +1652)	50	(90)	1	(1.8)
Type N	-200 ... +1300 (-328 ... +2372)	50	(90)	1	(1.8)
Type R	-50 ... +1760 (-58 ... +3200)	100	(180)	2	(3.6)
Type S	-50 ... +1760 (-58 ... +3200)	100	(180)	2	(3.6)
Type T	-200 ... +400 (-328 ... +752)	40	(72)	1	(1.8)
Type U	-200 ... +600 (-328 ... +1112)	50	(90)	2	(3.6)

<sup>1)</sup> The digital accuracy in the range 0 to 300 °C (32 to 572 °F) is 3 °C (5.4 °F).

<sup>2)</sup> The digital accuracy in the range 1750 to 2300 °C (3182 to 4172 °F) is 2 °C (3.6 °F).

#### mV sensor

Input	Measuring range mV	Min. mea- sured span mV	Digital accuracy μV
mV sensor	-100 ... +1100	20	400

The digital accuracy is the accuracy after the analog/digital conversion including linearization and calculation of the measured value.

An additional error is generated in the output current 4 to 20 mA as a result of the digital/analog conversion of 0,025 % of the set span (digital-analog error).

The total error under reference conditions at the analog output is the sum from the digital error and the digital-analog error (poss. with the addition of cold junction errors in the case of thermocouple measurements).

## Temperature Measurement

### Transmitters for rail mounting

#### SITRANS TR300 two-wire system, universal, HART

Selection and Ordering data	Article No.
<b>Temperature transmitter SITRANS TR300</b>	
For mounting on a standard DIN rail, two-wire system, 4 ... 20 mA, HART, with electrical isolation, with documentation on MiniDVD	
<ul style="list-style-type: none"> <li>Without explosion protection ▶ ◆ <b>7NG3033-0JN00</b></li> <li>With explosion protection to ATEX ▶ ◆ <b>7NG3033-1JN00</b></li> </ul>	
<b>Further designs</b>	Order code
Please add <b>"-Z"</b> to Article No. with and specify Order codes(s).	
With test protocol (5 measuring points)	<b>C11</b>
Functional safety SIL2	<b>C20</b>
Functional safety SIL2/3	<b>C23</b>
<b>Customer-specific programming</b>	
Add <b>"-Z"</b> to Article No. and specify Order code(s)	
Measuring range to be set Specify in plain text (max. 5 digits): Y01: ... to ... °C, °F	<b>Y01<sup>1)</sup></b>
Measuring point no. (TAG), max. 8 characters	<b>Y17<sup>2)</sup></b>
Measuring point descriptor, max. 16 characters	<b>Y23<sup>2)</sup></b>
Measuring point message, max. 32 characters	<b>Y24<sup>2)</sup></b>
Text on front label, max. 16 characters	<b>Y29<sup>2)3)</sup></b>
Pt100 (IEC) 2-wire, $R_L = 0 \Omega$	<b>U02<sup>4)</sup></b>
Pt100 (IEC) 3-wire	<b>U03<sup>4)</sup></b>
Pt100 (IEC) 4-wire	<b>U04<sup>4)</sup></b>
Thermocouple type B	<b>U20<sup>4)5)</sup></b>
Thermocouple type C (W5)	<b>U21<sup>4)5)</sup></b>
Thermocouple type D (W3)	<b>U22<sup>4)5)</sup></b>
Thermocouple type E	<b>U23<sup>4)5)</sup></b>
Thermocouple type J	<b>U24<sup>4)5)</sup></b>
Thermocouple type K	<b>U25<sup>4)5)</sup></b>
Thermocouple type L	<b>U26<sup>4)5)</sup></b>
Thermocouple type N	<b>U27<sup>4)5)</sup></b>
Thermocouple type R	<b>U28<sup>4)5)</sup></b>
Thermocouple type S	<b>U29<sup>4)5)</sup></b>
Thermocouple type T	<b>U30<sup>4)5)</sup></b>
Thermocouple type U	<b>U31<sup>4)5)</sup></b>
With TC: CJC external (Pt100, 3-wire)	<b>U41</b>
With TC: CJC external with fixed value, specify in plain text	<b>Y50</b>
Special differing customer-specific programming, specify in plain text	<b>Y09<sup>6)</sup></b>
Fail-safe value 3.6 mA (instead of 22.8 mA)	<b>U36<sup>2)</sup></b>

Accessories	Article No.
<b>MiniDVD for temperature measuring instruments</b>	<b>A5E00364512</b>
With documentation in German, English, French, Spanish, Italian, Portuguese and SIPROM T parameterization software	
<b>HART modem</b>	
<ul style="list-style-type: none"> <li>With USB connection ▶</li> </ul>	<b>7MF4997-1DB</b>
<b>Simatic PDM operating software</b>	<b>See Section 8</b>

▶ Available ex stock.

◆ We can offer shorter delivery times for configurations designated with the Quick Ship Symbol ◆. For details see page 9/5 in the appendix.

- For customer-specific programming for RTD and TC, the start value and the end value of the required measuring span must be specified here.
- For this selection, Y01 or Y09 must also be selected.
- Text on front plate is not saved in the device.
- For this selection, Y01 must also be selected.
- Internal cold junction compensation is selected as the default for TC.
- For customer-specific programming, for example mV and ohm, the start value and the end value of the required measuring span and the unit must be entered here.

Supply units see Chapter "Supplementary Components".

#### Ordering example 1:

7NG3033-0JN00-Z Y01+Y17+Y29+U03  
 Y01: -10 ... +100 °C  
 Y17: TICA123  
 Y29: TICA123


#### Ordering example 2:

7NG3033-0JN00-Z Y01+Y17+Y23+Y29+U25  
 Y01: -10 ... +100 °C  
 Y17: TICA123  
 Y23: TICA123HEAT  
 Y29: TICA123HEAT

#### Factory setting:

- Pt100 (IEC 751) with 3-wire circuit
- Measuring range: 0 ... 100 °C (32 ... 212 °F)
- Error signal in the event of sensor breakage: 22.8 mA
- Sensor offset: 0 °C (0 °F)
- Damping 0.0 s

**Dimensional drawings**

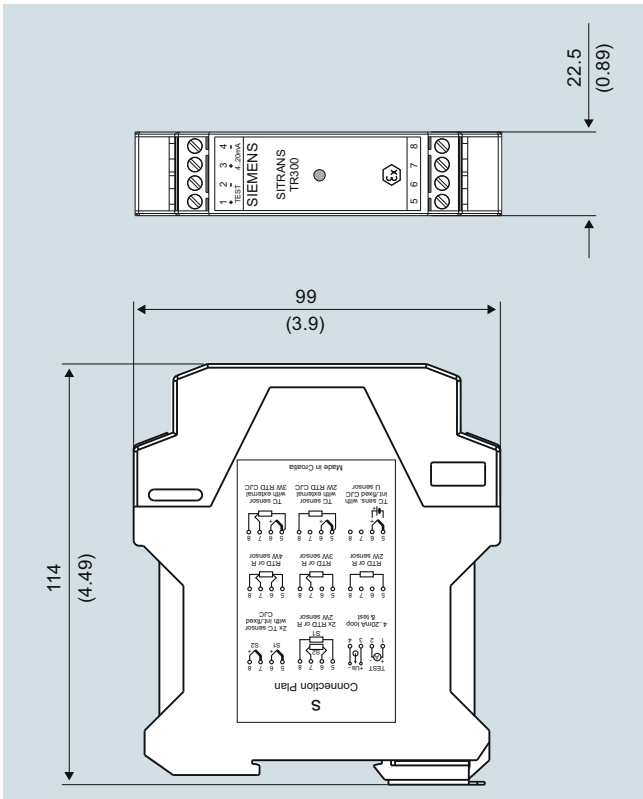

SITRANS TR300, dimensions in mm (inch)

**Schematics**

**Assignments**

1 (+) and 2 (-)	Test terminals (Test) for measurement of the output current with a multimeter
3 (+) and 4 (-)	Power supply $U_{aux}$ , Output current $I_{out}$
5, 6, 7 and 8	Sensor assignment, see schematics

SITRANS TR300, pin assignment


# Temperature Measurement

## Transmitters for rail mounting


### SITRANS TR300 two-wire system, universal, HART

2


#### Resistance thermometer




Two-wire system <sup>1)</sup>



Three-wire system




Four-wire system




Generation of average value/difference <sup>1)</sup>


#### Resistance




Two-wire system <sup>1)</sup>



Three-wire system




Four-wire system




Generation of average value/difference <sup>1)</sup>


#### Thermocouple




Cold junction compensation internal/fixed value



Cold junction compensation with external Pt100 in two-wire system <sup>1)</sup>




Cold junction compensation with external Pt100 in three-wire system




Generation of average value / difference with internal cold junction compensation

<sup>1)</sup> Programmable line resistance for the purpose of correction.


#### Voltage measurement




#### Current measurement



#### Test terminals



#### Power supply/ 4 ... 20 mA (U<sub>aux</sub>)



SITRANS TR300, sensor connection assignment

### Overview



#### The user-friendly transmitters for the control room

The SITRANS TW universal transmitter is a further development of the service-proven SITRANS T for the 4-wire system in a mounting rail housing. With numerous new functions it sets new standards for temperature transmitters.

With its diagnostics and simulation functions the SITRANS TW provides the necessary insight during commissioning and operation. And using its HART interface the SITRANS TW can be conveniently adapted with SIMATIC PDM to every measurement task.

All SITRANS TW control room devices are available in a non-intrinsically safe version as well as in an intrinsically safe version for use with the most stringent requirements.

### Application

The SITRANS TW transmitter is a four-wire rail-mounted device with a universal input circuit for connection to the following sensors and signal sources:

- Resistance thermometer
- Thermocouples
- Resistance-based sensors/potentiometers
- mV sensors
- As special version:
  - V sources
  - Current sources

The 4-wire rail-mounted SITRANS TW transmitter wire is designed for control room installation. It must not be mounted in potentially explosive atmospheres.

All SITRANS TW control room devices are available in a non-intrinsically safe version as well as in an intrinsically safe version for use with the most stringent requirements.


### Function

#### Features

- Transmitter in four-wire system with HART interface
- Housing can be mounted on 35 mm rail or 32 mm G rail
- Screw plug connector
- All circuits electrically isolated
- Output signal: 0/4 to 20 mA or 0/2 to 10 V
- Power supplies: 115/230 V AC/DC or 24 V AC/DC
- Explosion protection [EEx ia] or [EEx ib] for measurements with sensors in the hazardous area
- Temperature-linear characteristic for all temperature sensors

- Temperature-linear characteristic can be selected for all temperature sensors
- Automatic correction of zero and span
- Monitoring of sensor and cable for open-circuit and short-circuit
- Sensor fault and/or limit can be output via an optional sensor fault/limit monitor
- Hardware write protection for HART communication
- Diagnostic functions
- Slave pointer functions
- SIL1

#### Mode of operation

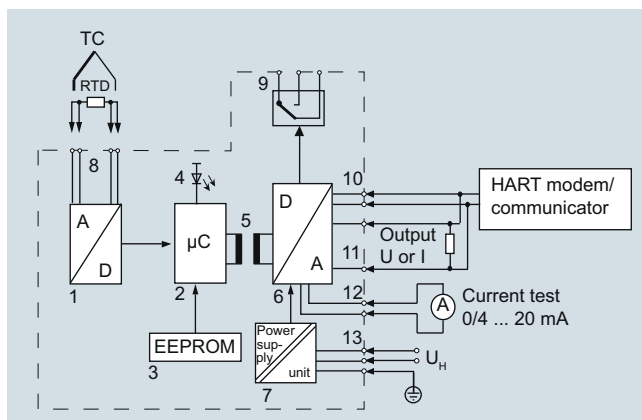

The signal output by a resistance-based sensor (two-wire, three-wire, four-wire system), voltage source, current source or thermocouple is converted by the analog-to-digital converter (1, function diagram) into a digital signal. This is evaluated in the microcontroller (2), corrected according to the sensor characteristic, and converted by the digital-to-analog converter (6) into an output current (0/4 to 20 mA) or output voltage (0/2 to 10 V). The sensor characteristics as well as the electronics data and the data for the transmitter parameters are stored in the non-volatile memory (3).

AC or DC voltages can be used as the power supply (13). Any terminal connections are possible for the power supply as a result of the bridge rectifier in the power supply unit. The PE conductor is required for safety reasons.

A HART modem or a HART communicator permit parameterization of the transmitter using a protocol according to the HART specification. The transmitter can be directly parameterized at the point of measurement via the HART output terminals (10).

The operation indicator (4) identifies a fault-free or faulty operating state of the transmitter. The limit monitor (9) enables the signaling of sensor faults and/or limit violations. In the case of a current output, the current can be checked on a meter connected to test socket (12).

#### Diagnosis and simulation functions

The SITRANS TW comes with extensive diagnosis and simulation functions.

Physical values can be defined with the simulation function. It is thus possible to check the complete signal path from the sensor input to inside the control system without additional equipment. The slave pointer functions are used to record the minimum and maximum of the plant's process variable.


## Temperature Measurement

### Transmitters for rail mounting

#### SITRANS TW four-wire system, universal, HART

#### Integration

##### System configuration

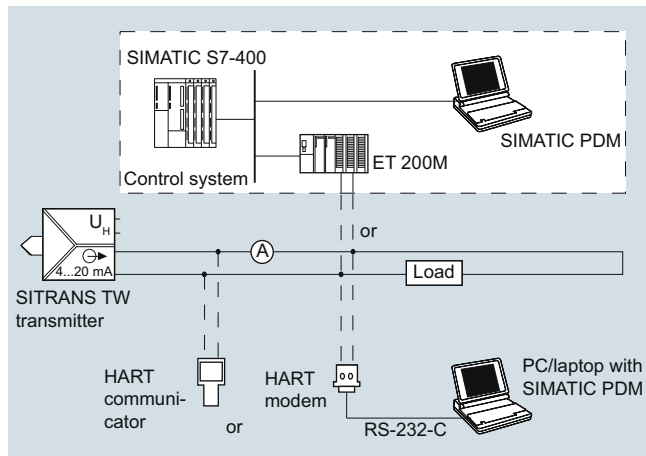

Possible system configurations

The SITRANS TW transmitter as a four-wire rail-mounted device can be used in a number of system configurations: as a stand-alone version or as part of a complex system environment, e.g. with SIMATIC S7. All device functions are available via HART communication.

Communication options through the HART interface:

- HART communicator
- HART modem connected to PC/laptop on which the appropriate software is available, e.g. SIMATIC PDM
- HART-compatible control system (e.g. SIMATIC S7-400 with ET 200M)

#### Technical specifications

##### Input

Selectable filters to suppress the line frequency

50 Hz, 60 Hz, also 10 Hz for special applications (line frequency filter is similar with measuring frequency)

##### Resistance thermometer

Measured variable

Temperature

Measuring range

Parameterizable

Measuring span

min. 25 °C (45 °F) x 1/scaling factor

Sensor type

- Acc. to IEC 751
- Acc. to JIS C 1604-81
- to DIN 43760
- Special type ( $R_{RTD} \leq 500 \Omega$ )

Pt100 (IEC 751)

Pt100 (JIS C 1604-81)

Ni100 (DIN 43760)

Multiples or parts of the defined characteristic values can be parameterized (e.g. Pt500, Ni120)

Characteristic curve

Temperature-linear, resistance-linear or customer-specific

Type of connection

- Normal connection
- Sum or parallel connection
- Mean-value or differential connection

Interface

2, 3 or 4-wire circuit

Measuring range limits

Depending on type of connected thermometer (defined range of resistance thermometer)

Sensor breakage monitoring

Monitoring of all connections for open-circuit (function can be switched off)

Sensor short-circuit monitoring

Parameterizable response threshold (function can be switched off)

##### Resistance-based sensor, potentiometer

Measured variable

Actual resistance

Measuring range

Parameterizable

Measuring span

min. 10  $\Omega$

Characteristic curve

Resistance-linear or customer-specific

Type of connection

- Normal connection
- Differential connection
- Mean-value connection

Interface

2, 3 or 4-wire circuit

Input range

0 ... 6000  $\Omega$ ;  
with mean-value and difference circuits: 0 ... 3000  $\Omega$

Sensor breakage monitoring

Monitoring of all connections for open-circuit (function can be switched off)

Sensor short-circuit monitoring

Parameterizable response threshold (function can be switched off)



## Temperature Measurement Transmitters for rail mounting

### SITRANS TW four-wire system, universal, HART

<u>Thermocouples</u>		<u>µA-, mA sources</u>	
Measured variable	Temperature	Measured variable	DC voltage
Measuring range	Parameterizable	Measuring range	Parameterizable
Measuring span	min. 50 °C (90 °F) x 1/scaling factor	Characteristic curve	Current-linear or customer-specific
Measuring range limits	Depend. on type of thermocouple element	Input range/min. span	
Thermocouple element	Type B: Pt30 %Rh/Pt6 %Rh (DIN IEC 584) Type C: W5 %-Re (ASTM 988) Type D: W3 %-Re (ASTM 988) Type E: NiCr/CuNi (DIN IEC 584) Type J: Fe/CuNi (DIN IEC 584) Type K: NiCr/Ni (DIN IEC 584) Type L: Fe-CuNi (DIN 43710) Type N: NiCrSi-NiSi (DIN IEC 584) Type R: Pt13 %Rh/Pt (DIN IEC 584) Type S: Pt10 %Rh/Pt (DIN IEC 584) Type T: Cu/CuNi (DIN IEC 584) Type U: Cu/CuNi (DIN 43710) Special type (-10 mV ≤ UTC ≤ 100 mV)	<ul style="list-style-type: none"> <li>• Devices with 7NG3242-xxxx<b>4</b></li> <li>• Devices with 7NG3242-xxxx<b>5</b></li> <li>• Devices with 7NG3242-xxxx<b>6</b></li> <li>• Devices with 7NG3242-xxxx<b>7</b> or 7NG3242-xxxx<b>0</b> with U/I plug</li> <li>• Devices with 7NG3242-xxxx<b>8</b></li> </ul> Sensor breakage monitoring Not possible	-12 ... +100 µA/0.4 µA -120 ... +1000 µA/4 mA -1.2 ... +10 mA/0.04 mA -12 ... +100 mA/0.4 mA -120 ... +1000 mA/4 mA
Characteristic curve	Temperature-linear, voltage-linear or customer-specific	<b>Output</b>	
Type of connection	<ul style="list-style-type: none"> <li>• Normal connection</li> <li>• Averaging connection</li> <li>• Mean-value connection</li> <li>• Differential connection</li> </ul>	<u>Output signal</u>	Load-independent direct current 0/4 ... 20 mA, can be switched to load-independent DC voltage 0/2 ... 10 V using plug-in jumpers
Cold junction compensation	None, internal measurement, external measurement or pre-defined fixed value	Current 0/4 ... 20 mA	
Sensor breakage monitoring	Function can be switched off	<ul style="list-style-type: none"> <li>• Overrange</li> </ul>	-0.5 ... +23.0 mA, continuously adjustable
<u>mV sensors</u>		<ul style="list-style-type: none"> <li>• Output range following sensor fault (conforming to NE43)</li> <li>• Load</li> <li>• No-load voltage</li> </ul>	-0.5 ... +23.0 mA, continuously adjustable ≤ 650 Ω ≤ 30 V
Measured variable	DC voltage	Voltage 0/2 ... 10 V	
Measuring range	Parameterizable	<ul style="list-style-type: none"> <li>• Overrange</li> </ul>	-0.25 ... +10.75 V, continuously adjustable
Measuring span	min. 4 mV	<ul style="list-style-type: none"> <li>• Output range following sensor fault</li> <li>• Load resistance</li> <li>• Load capacitance</li> <li>• Short-circuit current</li> </ul>	-0.25 ... +10.75 V, continuously adjustable ≥ 1 kΩ ≤ 10 nF
Input range	-120 ... +1000mV	<ul style="list-style-type: none"> <li>• Electrical damping</li> <li>- adjustable time constant <math>T_{63}</math></li> <li>• Current source/voltage source</li> </ul>	0 ... 100 s, in steps of 0.1 s Continuously adjustable within the total operating range
Characteristic curve	Voltage-linear or customer-specific	<u>Sensor fault/limit signalling</u>	By operation indicator, relay output or HART interface
Overload capacity of inputs	max. ± 3.5 V	Operation indicator	Flashing signal
Input resistance	≥ 1 MΩ	<ul style="list-style-type: none"> <li>• Limit violation</li> <li>• Sensor fault monitoring</li> </ul>	Flashing frequency 5 Hz Flashing frequency 1 Hz
Sensor current	Approx. 180 µA	Relay outputs	Either as NO or NC contact with 1 changeover contact
Sensor breakage monitoring	Function can be switched off	<ul style="list-style-type: none"> <li>• Switching capacity</li> <li>• Switching voltage</li> <li>• Switching current</li> </ul>	≤ 150 W, ≤ 625 VA ≤ 125 V DC, ≤ 250 V AC ≤ 2.5 A DC
<u>V sources</u>		Sensor fault monitoring	Signalling of sensor or line breakage and sensor short-circuit
Measured variable	DC voltage	Limit monitoring	
Measuring range	Parameterizable	<ul style="list-style-type: none"> <li>• Operating delay</li> <li>• Monitoring functions of limit module</li> </ul>	0 ... 10 s
Characteristic curve	Voltage-linear or customer-specific		<ul style="list-style-type: none"> <li>• Sensor fault (breakage and/or short-circuit)</li> <li>• Lower and upper limit</li> <li>• Window (combination of lower and upper limits)</li> <li>• Limit and sensor fault detection can be combined</li> </ul>
Input range/min. span			
<ul style="list-style-type: none"> <li>• Devices with 7NG3242-xxxx<b>1</b> or 7NG3242-xxxx<b>0</b> with U/I plug</li> <li>• Devices with 7NG3242-xxxx<b>2</b></li> <li>• Devices with 7NG3242-xxxx<b>3</b></li> </ul>	-1.2 ... + 10 V/0.04 V -12 ... +100 V/0.4 V -120 ... +140 V/4.0 V		
Sensor breakage monitoring	Not possible	<ul style="list-style-type: none"> <li>• Hysteresis</li> </ul>	Parameterizable between 0 and 100 % of measuring range

## Temperature Measurement

### Transmitters for rail mounting

#### SITRANS TW four-wire system, universal, HART

<b>Auxiliary power</b>		<b>Certificates and approvals</b>	
Universal power supply unit	115/230 V AC/DC or 24 V AC/DC	ATEX	To DIN EN 50014: 1997, EN 50020: 1994
Tolerance range for power supply		Intrinsic safety to EN 50 020	
• With 115/230 V AC/DC PSU	80 ... 300 V DC; 90 ... 250 V AC	• for 7NG3242-xAxxx	II (1) G D [Ex ia/ib ] IIB
• With 24 V AC/DC PSU	18 ... 80 V DC; 20.4 ... 55.2 V AC (in each case interruption-resistant up to 20 ms in the complete tolerance range)	• for 7NG3242-xBxxx	II (1) G D [Ex ia/ib ] IIC
Tolerance range for mains frequency	47 ... 63 Hz	EC type-examination certificate	TÜV (German Technical Inspectorate) 01 ATEX 1675
Power consumption with		Other certificates	GOST, NEPSI
• 230 V AC	≤ 5 VA	<b>Conditions of use</b>	
• 230 V DC	≤ 5 W	<u>Installation conditions</u>	
• 24 V AC	≤ 5 VA	Location (for devices with explosion protection)	
• 24 V DC	≤ 5 W	• Transmitters	Outside the potentially explosive atmosphere
<b>Electrically isolated</b>		• Sensor	Within the potentially explosive atmosphere zone 1 (also in zone 0 in conjunction with the prescribed protection requirements for the sensor)
Electrically isolated circuits	Input, output, power supply and sensor fault/limit monitoring output are electrically isolated from one another. The HART interface is electrically connected to the output.	<u>Ambient conditions</u>	
Working voltage between all electrically isolated circuits	The voltage $U_{rms}$ between any two terminals must not exceed 300 V	Permissible ambient temperature	-25 ... +70 °C (-13 ... +158 °F)
		Permissible storage temperature	-40 ... +85 °C (-40 ... +185 °F)
		Climatic class	
		• Relative humidity	5 ... 95 %, no condensation
<b>Measuring accuracy</b>		<b>Design</b>	
Accuracy		Weight	Approx. 0.24 kg (0.53 lb)
• Error in the internal cold junction	≤ 3 °C ± 0.1 °C / 10 °C (≤ 5.4 °F ± 0.18 °F / 18 °F)	Enclosure material	PBT, glass-fibre reinforced
• Error of external cold junction terminal 7NG3092-8AV	≤ 0.5 °C ± 0.1 °C / 10 °C (≤ 0.9 °F ± 0.18 °F / 18 °F)	Degree of protection to IEC 529	IP20
• Digital output	See "Digital error"	Degree of protection to VDE 0100	Protection class I
• Analog output $I_{AN}$ or $U_{AN}$	≤ 0.05 % of the span plus digital error	Type of installation	35-mm DIN rail (1.38 inch) (EN 50022) or 32-mm G-type rail (1.26 inch) (EN 50035)
Influencing effects (referred to the digital output)	Compared to the max. span:	Electrical connection / process connection	Screw plug connectors, max. 2.5 mm <sup>2</sup> (0.01 inch <sup>2</sup> )
• Temperature drift	≤ 0.08 % / 10 °C (≤ 0.08 % / 18 °F) ≤ 0.2 % in the range -10 ... +60 °C (14 ... 140 °F)	<b>Parameterization interface</b>	
• Long-term drift	≤ 0.1 % / year	Protocol	HART, version 5.9
Influencing effects referred to the analog output $I_{AN}$ or $U_{AN}$	Compared to the span:	Load with connection of	
• Temperature drift	≤ 0.08 % / 10 °C (≤ 0.08 % / 18 °F) ≤ 0.2 % in the range -10 ... +60 °C (14 ... 140 °F)	• HART communicator	230 ... 650 Ω
• Power supply	≤ 0.05 % / 10 V	• HART modem	230 ... 500 Ω
• Load with current output	≤ 0.05 % on change from 50 Ω to 650 Ω	Software for PC/laptop	SIMATIC PDM version V5.1 and later
• Load with voltage output	≤ 0.1 % on change in the load current from 0 mA to 10 mA		
• Long-term drift (start-of-scale value, span)	≤ 0.03 % / month		
Response time ( $T_{63}$ without electrical damping)	≤ 0.2 s		
<b>Electromagnetic compatibility</b>	According to EN 61 326 and NAMUR NE21		

### Digital error

#### Resistance thermometer

Input	Measuring range	Max. permissible line resistance	Digital error
	°C / (°F)		Ω
<b>IEC 751</b>			
• Pt10	-200 ... +850 (-328 ... +1562)	20	3.0 (5.4)
• Pt50	-200 ... +850 (-328 ... +1562)	50	0.6 (1.1)
• Pt100	-200 ... +850 (-328 ... +1562)	100	0.3 (0.5)
• Pt200	-200 ... +850 (-328 ... +1562)	100	0.6 (1.1)
• Pt500	-200 ... +850 (-328 ... +1562)	100	1.0 (1.8)
• Pt1000	-200 ... +850 (-328 ... +1562)	100	1.0 (1.8)
<b>JIS C 1604-81</b>			
• Pt10	-200 ... +649 (-328 ... +1200)	20	3.0 (5.4)
• Pt50	-200 ... +649 (-328 ... +1200)	50	0.6 (1.1)
• Pt100	-200 ... +649 (-328 ... +1200)	100	0.3 (0.5)
<b>DIN 43760</b>			
• Ni50	-60 ... +250 (-76 ... +482)	50	0.3 (0.5)
• Ni100	-60 ... +250 (-76 ... +482)	100	0.3 (0.5)
• Ni120	-60 ... +250 (-76 ... +482)	100	0.3 (0.5)
• Ni1000	-60 ... +250 (-76 ... +482)	100	0.3 (0.5)

#### Resistance-based sensors

Input	Measuring range	Max. permissible line resistance	Digital error
	Ω		Ω
Resistance (linear)	0 ... 24	5	0.08
	0 ... 47	15	0.06
	0 ... 94	30	0.06
	0 ... 188	50	0.08
	0 ... 375	100	0.1
	0 ... 750	100	0.2
	0 ... 1500	75	1.0
	0 ... 3000	100	1.0
	0 ... 6000	100	2.0

#### Thermocouples

Input	Measuring range	Digital error <sup>1)</sup>
	°C / (°F)	°C (°F)
Type B	0 ... +1820 (+32 ... +3308)	3 (5.4)
Type C	0 ... +2300 (+32 ... +4172)	2 (3.6)
Type D	0 ... +2300 (+32 ... +4172)	1 (1.8)
Type E	-200 ... +1000 (-328 ... +1832)	1 (1.8)
Type J	-210 ... +1200 (-346 ... +2192)	1 (1.8)
Type K	-200 ... +1372 (-328 ... +2501)	1 (1.8)
Type L	-200 ... +900 (-328 ... +1652)	2 (3.6)
Type N	-200 ... +1300 (-328 ... +2372)	1 (1.8)
Type R	-50 ... +1760 (-58 ... +3200)	2 (3.6)
Type S	-50 ... +1760 (-58 ... +3200)	2 (3.6)
Type T	-200 ... +400 (-328 ... +752)	1 (1.8)
Type U	-200 ... +600 (-328 ... +1112)	2 (3.6)

<sup>1)</sup> Accuracy data refer to the largest error in the complete measuring range

#### Voltage/current sources

Input	Measuring range	Digital error
<b>mV sources (linear)</b>	<b>mV</b>	<b>μV</b>
	-1 ... +16	35
	-3 ... +32	20
	-7 ... +65	20
	-15 ... +131	50
	-31 ... +262	100
	-63 ... +525	200
	-120 ... +1000	300
<b>V sources (linear)</b>	<b>V</b>	<b>mV</b>
	-1.2 ... +10	3
	-12 ... +100	30
<b>μA/mA sources (linear)</b>	<b>μA/mA</b>	<b>μA</b>
	-12 ... +100 μA	0.05
	-120 ... +1000 μA	0.5
	-1.2 ... +10 mA	5
	-12 ... +100 mA	50
	-120 ... +1000 mA	500

## Temperature Measurement

### Transmitters for rail mounting

#### SITRANS TW four-wire system, universal, HART

##### Ordering examples

Desired transmitter	Parameter:		Ordering design
	Standard	Special	
<b>Example 1:</b> SITRANS TW, transmitter in four-wire system <ul style="list-style-type: none"> <li>• with explosion protection ATEX</li> <li>• 230 V AC/DC power supply</li> <li>• current output</li> <li>• without sensor fault/limit monitor               <ul style="list-style-type: none"> <li>- Sensor PT100, three-wire circuit</li> <li>- Measuring range 0 ... 150 °C</li> <li>- Temperature-linear characteristic</li> <li>- Filter time 1 s</li> <li>- Output 4 ... 20 mA, line filter 50 Hz</li> <li>- Output driven to full-scale in event of like breakage</li> </ul> </li> </ul>	X		7NG3242-1AA00 (stock item)
<b>Example 2:</b> SITRANS TW, transmitter in four-wire system <ul style="list-style-type: none"> <li>• without explosion protection</li> <li>• 24 V AC/DC power supply</li> <li>• Voltage output</li> <li>• Sensor fault/limit monitor               <ul style="list-style-type: none"> <li>- Rating plate in English</li> <li>- Sensor NiCr/Ni, type K</li> <li>- Cold junction internal</li> <li>- Measuring range 0 ... 950 °C</li> <li>- Temperature-linear characteristic</li> <li>- Filter time 1 s</li> <li>- Output 0 ... 10 V, line filter 50 Hz</li> <li>- Output driven to full-scale in event of like breakage</li> <li>- Limit monitoring switched off</li> </ul> </li> </ul>	X	S76 A05 Y30	7NG3242-0BB10-Z Y01 + S76 + A05 + Y30 + H10 Y01: see Order code Y30: MA=0; ME= 950; D=C
<b>Example 3:</b> SITRANS TW, transmitter in four-wire system <ul style="list-style-type: none"> <li>• without explosion protection</li> <li>• 24 V AC/DC power supply</li> <li>• Current output</li> <li>• without sensor fault/limit monitor               <ul style="list-style-type: none"> <li>- Voltage input, measuring range -1.2 V ... +10 V</li> <li>- Measuring range 0 ... 5 V</li> <li>- Source-proportional characteristic</li> <li>- Filter time 10 s</li> <li>- Output 0 ... 20 mA, line filter 60 Hz</li> <li>- No monitoring for sensor fault</li> </ul> </li> </ul>	(X)	A40 Y32 G07 H11 J03	7NG3242-0BA01-Z Y01 + A40 + Y32 + G07 + H11 + J03 Y01: see Order code Y32: MA=0; ME= 5; D=V

##### Ordering information

The article number structure shown below is used to specify a fully functioning transmitter. The selection of the operating data (type of source, measuring range, characteristic etc.) is made according to the following rules:

- Operating data already set in factory to default values:  
The default settings can be obtained from the list of parameterizable operating data (see "Special operating data"). The presets can be modified by the customer to match the requirements precisely.
- Operating data set on delivery according to customer requirements:  
Supplement the Article No. by "-Z" and add the Order code "Y01". The operating data to be set can be obtained from the list of parameterize operating data. The Order codes A ■■ to K ■■ for operating data to be set need only be specified in the order if they deviate from the default setting.  
The default setting is used if no Order code is specified for operating data.

The selected parameters are printed on the transmitter's rating plate.

Selection and Ordering data	Article No.
<b>SITRANS TW universal transmitter</b> for rail mounting, in four-wire system (order instruction manual separately) ↗ Click on the Article No. for the online configuration in the PIA Life Cycle Portal.	7 NG 3 2 4 2 -
<b>Explosion protection</b> Without ▶◆ 0 For inputs [EEx ia] or [EEx ib] ▶◆ 1	
<b>Power supply</b> 115/230 V AC/DC ▶◆ A 24 V AC/DC ▶◆ B	
<b>Output signal</b> 0/4 ... 20 mA (can be switched to 0/2 ... 10 V) ▶◆ A 0/2 ... 10 V (can be switched to 0/4 ... 20 mA) ▶◆ B	
<b>Sensor fault/limit monitor</b> Without (retrofitting not possible) ▶◆ 0 Relay with changeover contact ▶◆ 1	
<b>Input for</b> Temperature sensor, resistance-based sensor and mV sensor with measuring range -120 ... +1000 mV DC and with U/I plug Voltage input (V sources) <sup>1)</sup> Measuring range: • -1.2 ... +10 V DC 1 • -12 ... +100 V DC (not Ex version) 2 • -120 ... +140 V DC (not Ex version) 3 Current input (µA, mA sources) <sup>1)</sup> Measuring range: • -12 ... +100 µA DC 4 • -120 ... +1000 µA DC 5 • -1.2 ... +10 mA DC 6 • -12 ... +100 mA DC 7 • -120 ... +1000 mA DC 8	
<b>Further designs</b> Please add "-Z" to Article No. and specify Order code(s) (see "List of parameterizable operating data").	Order code
Customer-specific setting of operating data (see "List of parameterizable operating data")	Y01
<b>Note:</b> specify in plain text: „see Order code“	
Meas. point description (max. 16 char.)	Y23
Text on front of device (max. 32 char.)	Y24
HART tag (max. 8 characters)	Y25
With test report	P01
With shorting plug to HART communication for 0 mA or 0 V	S01
With plug for external cold junction compensation	S02
With U/I plug (-1.2 ... +10 V DC or -12 ... +100 mA)	S03
Language of rating plate (together with Y01 Order Code only)	
• Italian	S72
• English	S76
• French	S77
• Spanish	S78

<sup>1)</sup> Observe max. values with Ex version.

▶ Available ex stock.

◆ We can offer shorter delivery times for configurations designated with the Quick Ship Symbol ◆. For details see page 9/5 in the appendix.

Selection and Ordering data	Article No.
<b>Accessories</b>	
<b>MiniDVD for temperature measuring instruments</b> ▶	A5E00364512
With documentation in German, English, French, Spanish, Italian, Portuguese and SIPROM T parameterization software	
<b>Instruction Manual for SITRANS TW</b>	
German/English ▶	A5E00054075
French/Italian/Spanish ▶	A5E00064515
<b>Cold junction terminal</b> ▶	7NG3092-8AV
<b>U/I plug</b> (-1.2 ... +10 V DC pr -12 ... +100 mA) ▶	7NG3092-8AW
<b>SIMATIC PDM operating software</b>	see Chapter 8
<b>HART modem</b>	
With USB interface ▶	7MF4997-1DB

# Temperature Measurement

## Transmitters for rail mounting

### SITRANS TW four-wire system, universal, HART

#### List of parameterizable operating data (Order codes A ■ ■ + B ■ ■ ... E ■ ■)

Operating data acc. to default setting      Article No. with Order code: 7NG3242 - ■ ■ ■ ■ -Z Y01

Order codes: A ■ ■ ... E ■ ■

Sensor	Temperature range	Connection	Cold junction compensation	Measuring ranges
<b>Thermocouples</b>				
B: Pt30 %Rh/Pt6 %Rh	0 ... 1820 °C	A 0 0 Standard	B 0 1 None	C 0 0 -30 ... +60 °C
C: W5 %Re	0 ... 2300 °C	A 0 1 Sum n <sup>1)</sup> n = 2	B 0 2 Internal	C 1 0 -20 ... +20 °C
D: W3 %Re	0 ... 2300 °C	A 0 2 ...	B 0 3 Fixed val. 0 °C	C 2 0 0 ... 40 °C
E: NiCr/CuNi	-200 ... +1000 °C	A 0 3 ... n = 10	B 1 0 20 °C	C 2 2 0 ... 60 °C
J: Fe/CuNi (IEC)	-210 ... +1200 °C	A 0 4 Difference <sup>2)</sup> Diff1	B 3 1 External meas.	C 2 5 50 °C
K: NiCr/Ni	-200 ... +1372 °C	A 0 5 Diff2	B 3 2 60 °C	C 2 6 0 ... 100 °C
L: Fe/CuNi (DIN)	-200 ... +900 °C	A 0 6 Mean-val. <sup>2)</sup> MW	B 4 1 70 °C	C 2 7 0 ... 120 °C
N: NiCrSi/NiSi	-200 ... +1300 °C	A 0 7	B 4 1 Special value <sup>7)</sup>	Y 1 0 0 ... 150 °C
R: Pt13 %Rh/Pt	-50 ... +1760 °C	A 0 8	B 4 1 External meas.	Y 1 1 0 ... 200 °C
S: Pt10 %Rh/Pt	-50 ... +1760 °C	A 0 9	B 4 1 (through Pt100 DIN IEC 751) <sup>7)</sup>	0 ... 250 °C
T: Cu/CuNi (IEC)	-200 ... +400 °C	A 1 0		0 ... 300 °C
U: Cu/CuNi (DIN)	-200 ... +600 °C	A 1 1		0 ... 350 °C
				0 ... 400 °C
				0 ... 450 °C
				0 ... 500 °C
				0 ... 600 °C
				0 ... 700 °C
				0 ... 800 °C
				0 ... 900 °C
				0 ... 1000 °C
				0 ... 1200 °C
				0 ... 1400 °C
				0 ... 1600 °C
				0 ... 1800 °C
				50 ... 100 °C
				50 ... 150 °C
				100 ... 200 °C
				100 ... 300 °C
				100 ... 400 °C
				200 ... 300 °C
				200 ... 400 °C
				200 ... 500 °C
				300 ... 600 °C
				500 ... 1000 °C
				600 ... 1200 °C
				800 ... 1600 °C
				Special range <sup>7)</sup>
				0 ... 600 °C
				0 ... 700 °C
				0 ... 800 °C
				0 ... 900 °C
				0 ... 1000 °C
				0 ... 1200 °C
				0 ... 1400 °C
				0 ... 1600 °C
				0 ... 1800 °C
				50 ... 100 °C
				50 ... 150 °C
				100 ... 200 °C
				100 ... 300 °C
				100 ... 400 °C
				200 ... 300 °C
				200 ... 400 °C
				200 ... 500 °C
				300 ... 600 °C
				500 ... 1000 °C
				600 ... 1200 °C
				800 ... 1600 °C
				Special range <sup>7)</sup>
				0 Ω
				10 Ω
				20 Ω
				50 Ω
				Special val. <sup>7)</sup>
				0 ... 1000 °C
				0 ... 1200 °C
				0 ... 1400 °C
				0 ... 1600 °C
				0 ... 1800 °C
				50 ... 100 °C
				50 ... 150 °C
				100 ... 200 °C
				100 ... 300 °C
				100 ... 400 °C
				200 ... 300 °C
				200 ... 400 °C
				200 ... 500 °C
				300 ... 600 °C
				500 ... 1000 °C
				600 ... 1200 °C
				800 ... 1600 °C
				Special range <sup>7)</sup>
				0 Ω
				10 Ω
				20 Ω
				50 Ω
				Special val. <sup>7)</sup>
				0 ... 2500 Ω
				0 ... 5000 Ω <sup>8)</sup>
				0 ... 6000 Ω <sup>8)</sup>
				Special range <sup>7)</sup>
				0 ... 100 Ω
				0 ... 200 Ω
				0 ... 500 Ω
				0 ... 1000 Ω
				0 ... 2500 Ω
				0 ... 5000 Ω <sup>8)</sup>
				0 ... 6000 Ω <sup>8)</sup>
				Special range <sup>7)</sup>
				0 ... 100 Ω
				0 ... 200 Ω
				0 ... 500 Ω
				0 ... 1000 Ω
				0 ... 2500 Ω
				0 ... 5000 Ω <sup>8)</sup>
				0 ... 6000 Ω <sup>8)</sup>
				Special range <sup>7)</sup>

mV, V and μA, mA sensors <sup>9)</sup>	Meas. range with Article No.	7NG 3242 - ■ ■ ■ ■ -Z Y01	E 5 0
		0	-120 ... +1000 mV
		1	-1,2 ... +10 V <sup>10)</sup>
		2	-12 ... +100 V <sup>10)</sup>
		3	-120 ... +140 V <sup>10)</sup>
		4	-12 ... +100 μA <sup>10)</sup>
		5	-120 ... +1000 μA <sup>10)</sup>
		6	-1,2 ... +10 mA <sup>10)</sup>
		7	-12 ... +100 mA <sup>10)</sup>
		8	-120 ... +1000 mA <sup>10)</sup>
			Special range <sup>7)</sup>
			Y 3 2

1) n = number of thermocouple elements to be connected in series  
 2) See „Circuit diagrams“ for meaning of type circuit  
 3) Line resistance of channels 1 and 2, for max. permissible line resistance see „Technical specifications“ (only with C32, not with C33 and C34)  
 4) n = number of resistance thermometers to be connected in series  
 5) 1/n = number of resistance thermometers to be connected in parallel  
 6) Combination of series and parallel connection of resistance thermometers  
 7) Operating data: see „Special operating data“  
 8) This range does not apply to mean-value and difference circuits.  
 9) The max. permissible currents and voltages according to conformity certificate must be observed in devices with explosion protection.  
 10) Without detection of line breakage

## Temperature Measurement Transmitters for rail mounting

SITRANS TW four-wire system, universal, HART

### List of parameterizable operating data (Order codes F ■ ■ ■ ... K ■ ■ ■)

Operating data according to default setting

Article No. with Order code: 7NG3242 - ■ ■ ■ ■ ■ -Z Y01

Order codes: F ■ ■ ■ ... K ■ ■ ■

Sensor		+	+	+	+	+	+			
Thermocouple elements		Voltage measurement	Filter time <sup>1)</sup>	Output signal and line filter <sup>2)</sup>	Failure signal	Limit monitor <sup>3)</sup>				
Type	Temperature range									
B: Pt30 %Rh/ C:W5 %Re	0 ... 1820 °C	A 0 0	Temperature-linear	F 0 0	0 s	G 0 0	4 ... 20 mA/	with line breakage/fault: to full scale to start of scale hold last value no monitoring Safety value <sup>5)</sup>	Limit monitoring ineffective (but sensor fault signalling with closed-circuit operation) Effective <sup>5)</sup>	K 0 0
D:W3 %Re	0 ... 2300 °C	A 0 1		F 1 0	0.1 s	G 0 1	2 ... 10 V			
E: NiCr/CuNi	-200 ... +1000 °C	A 0 2	Voltage-linear		0.2 s	G 0 2	with line filter:			
J: Fe/CuNi (IEC)	-210 ... +1200 °C	A 0 3			0.5 s	G 0 3	50 Hz			
K: NiCr/Ni	-200 ... +1372 °C	A 0 4			1 s	G 0 4	60 Hz			
L: Fe/CuNi (DIN)	-200 ... +900 °C	A 0 5			2 s	G 0 5	10 Hz <sup>4)</sup>			
N: NiCrSi/NiSi	-200 ... +1300 °C	A 0 6			5 s	G 0 6	0 ... 20 mA/			
R: Pt13 %Rh/Pt	-50 ... +1760 °C	A 0 7			10 s	G 0 7	0 ... 10 V			
S: Pt10 %Rh/Pt	-50 ... +1760 °C	A 0 8			20 s	G 0 8	with line filter:			
T: Cu/CuNi (IEC)	-200 ... +400 °C	A 0 9			50 s	G 0 9	50 Hz			
U: Cu/CuNi (DIN)	-200 ... +600 °C	A 1 0			100 s	G 1 0	60 Hz			
		A 1 1			Special time <sup>5)</sup>	Y 5 0	10 Hz	H 1 2		
<b>Resistance thermometer</b> (max. permissible line resistances see „Technical specifications“)		Voltage measurement	Filter time <sup>1)</sup>	Output signal and line filter <sup>2)</sup>	Failure signal	Limit monitor <sup>3)</sup>				
Pt100 (DIN IEC)	-200 ... +850 °C	A 2 0	Temperature-linear	F 0 0	same as for thermocouple elements	same as for thermocouple elements	with line breakage/fault:	to full scale to start of scale hold last value	J 0 0 J 0 1 J 0 2	
Pt100 (JIS)	-200 ... +649 °C	A 2 1					no monitoring		J 0 3	
Ni100 (DIN)	-60 ... +250 °C	A 2 2	Resistance-linear	F 2 0			Safety value <sup>5)</sup>		Y 6 0	
							with line breakage or short-circuit/fault:	to full scale to start of scale hold last value	J 1 0 J 1 1 J 1 2	
							no monitoring		J 1 3	
							Safety value <sup>5)</sup>		Y 6 1	
<b>Resistance-based sensors, potentiometers</b> (max. permissible line resistances see „Technical specifications“)		Voltage measurement	Filter time <sup>1)</sup>	Output signal and line filter <sup>2)</sup>	Failure signal	Limit monitor <sup>3)</sup>				
		A 3 0	Resistance-linear	F 2 0	same as for thermocouple elements	same as for thermocouple elements	with line breakage/fault:	to full scale to start of scale hold last value	J 0 0 J 0 1 J 0 2	
							no monitoring		J 0 3	
							Safety value <sup>5)</sup>		Y 6 0	
<b>mV, V and μA, mA sources</b>		A 4 0	Voltage measurement	Filter time <sup>1)</sup>	Output signal and line filter <sup>2)</sup>	Limit monitor <sup>3)</sup>				
			Source proportional	F 3 0	same as for thermocouple elements	same as for thermocouple elements				

1) Software filter to smooth the result

2) Filter to suppress line disturbances on the measured signal.

3) If signalling relay present

4) for special applications

5) Operating data: see „Special operating data“

## Temperature Measurement

### Transmitters for rail mounting

#### SITRANS TW four-wire system, universal, HART


##### Special operating data

Order code	Plain text required	Options
Y00	N=□□.□□	Factor N for multiplication with the characteristic values of resistance thermometers Range of values: 0.10 to 10.00 1. Example: 3 x Pt500 parallel: N = 5/3 = 1.667; 2. Example: Ni120: N = 1.2
Y10	TV=□□□□.□□ D=□	Temperature TV of the fixed cold junction Dimension; range of values: C, K, F, R
Y11	RL=□□□.□□	Line resistance RL in $\Omega$ for compensation of cold junction line of external Pt100 DIN IEC 751 Range of values: 0.00 to 100.00
Y20	RL1=□□□.□□ RL2=□□□.□□	Line resistances RL of channel 1 (RL1) and channel 2 (RL2) in $\Omega$ if the resistance thermometer or the resistance-based sensor is connected in a two-wire system Range of values depending on type of sensor: 0.00 to 100.00
Y30	MA=□□□□.□□ ME=□□□□.□□  D=□	Start-of-scale value MA and full-scale value ME for thermocouples and resistance thermometers (Range of values depending on type of sensor) Dimension, range of values: C, K, F, R)
Y31	MA=□□□□.□□ ME=□□□□.□□	Start-of-scale value MA and full-scale value ME for resistance-based sensors or potentiometers in $\Omega$ Range of values: 0.00 to 6,000.00
Y32	MA=□□□□.□□ ME=□□□□.□□  D=□□	Start-of-scale value MA and full-scale value ME for mV, V, $\mu$ A and mA sources Range of values depending on type of sensor: -120.00 to 1,000.00 Dimension (mV entered as MV, V as V, $\mu$ A as UA, mA as MA)
Y50	T63=□□□.□	Response time T63 of software filter in s Range of values: 0.0 to 100.0 Safety value S of signal output in mA or in V corresponding to the set type of output. Range of values - with current output: -0.50 to 23.00 - with voltage output: -0.25 to 10.75
Y60	S=□□.□□	Safety value S with line breakage of sensor
Y61	S=□□.□□	Safety value S with line breakage or short-circuit of sensor
Y70	UG=□□□□.□□  OG=□□□□.□□  H=□□□□.□□  K=□  A=□  T=□□.□	Lower limit value (dimension as defined by measuring range) Upper limit value (dimension as defined by measuring range) Hysteresis (dimension as defined by measuring range) Switch on/off combination of limit function and sensor fault detection; J=on; N=off (standard: J) Type of relay output: A=open-circuit operation; R=closed-circuit operation (standard: R) Switching delay T of relay output in s Range of values: 0.0 to 10.0 (standard: 0.0)



### Schematics

#### Sensor input connections

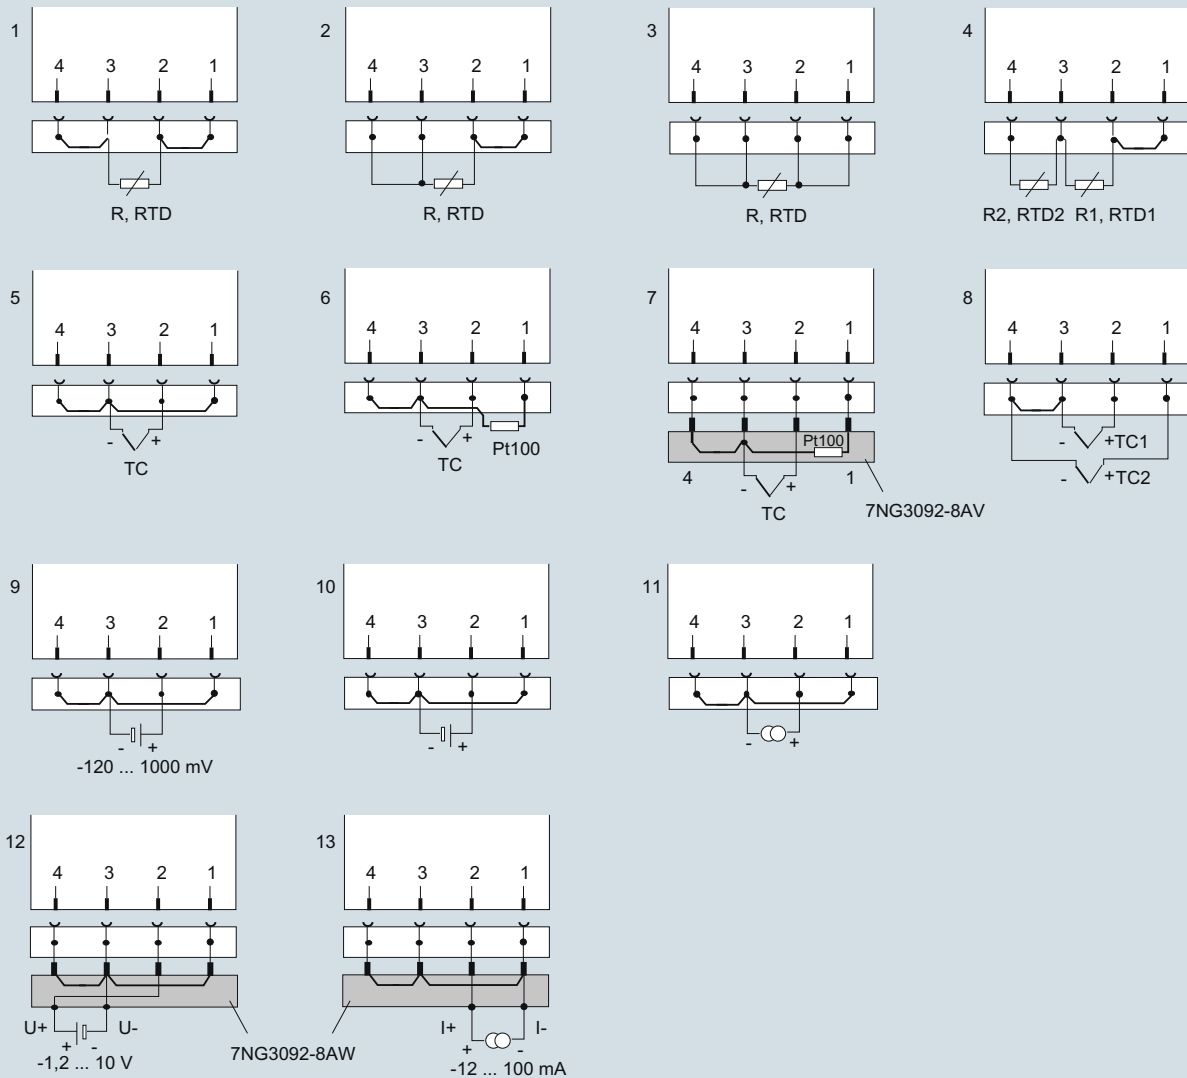

Resistance thermometers, resistance-based sensors, potentiometers:

- 1 Two-wire system; resistance can be parameterized for line compensation
- 2 Three-wire system
- 3 Four-wire system
- 4 Difference/mean-value circuit; 2 resistors can be parameterized for line compensation

Thermocouples:

- 5 Determination of cold junction temperature using built-in Pt100 or fixed reference temperature
- 6 Determination of cold junction temperature using external Pt100; resistance can be parameterized for line compensation
- 7 Determination of cold junction temperature using cold junction terminal 7NG3092-8AV
- 8 Difference/mean-value circuit with internal cold junction temperature

Further sources:

- 9 mV sources with two-wire system (7NG3242-xxxx0)
- 10 V sources with two-wire system (7NG3242-xxxx[1-3])
- 11 mA/mA sources with two-wire system (7NG3242-xxxx[4-8])
- 12 Voltage measurement -1,2 to 10 V with U/I plug 7NG3092-8AW (7NG3242-xxxx0)
- 13 Current measurement -12 to 100 mA with U/I plug 7NG3092-8AW (7NG3242-xxxx0)

Connection diagram for the input signal

Channel 1 is the measured variable between the terminals 2 and 3 on the input plug. With a difference or mean-value circuit, the calculation of the measured value is defined by the type of measurement. Otherwise the measured value is determined via channel 1. The following code is used for the type of measurement:


type of measurement	Calculation of measured value
Single channel	Channel 1
Differential connection 1	Channel 1 - Channel 2
Differential connection 2	Channel 2 - Channel 1
Mean-value 1	$\frac{1}{2} \cdot (\text{Channel 1} + \text{Channel 2})$

The short-circuit jumpers shown in the circuits must be inserted in the respective system on site.

## Temperature Measurement

### Transmitters for rail mounting

#### SITRANS TW four-wire system, universal, HART

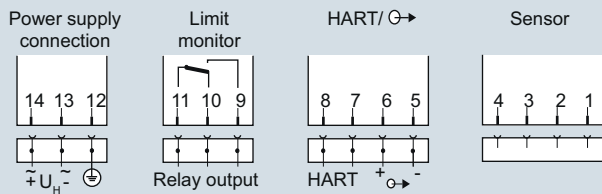


- 1 to 4 Signal input (see "sensor input connections" for possible types of connection)
- 5, 6 Analog output (U or I output parameterizable using plug-in jumpers)
- 7, 8 Connection with HART communication for local parameterization
- 9 to 11 Output for sensor fault/limit monitor as relay contact (see below for possible parameterization)
- 12 PE connection
- 13, 14 Power supply input (protected against reverse polarity)

Connection diagram for power supply, input and outputs

#### Relay outputs

	Connected terminals
Closed-circuit operation (relay opens when error)	
• Device switched off	10 and 11
• Device switched on and no error	9 and 11
• Device switched on and error	10 and 11
Open-circuit operation (relay closes when error)	
• Device switched off	10 and 11
• Device switched on and no error	10 and 11
• Device switched on and error	9 and 11

#### Dimensional drawings

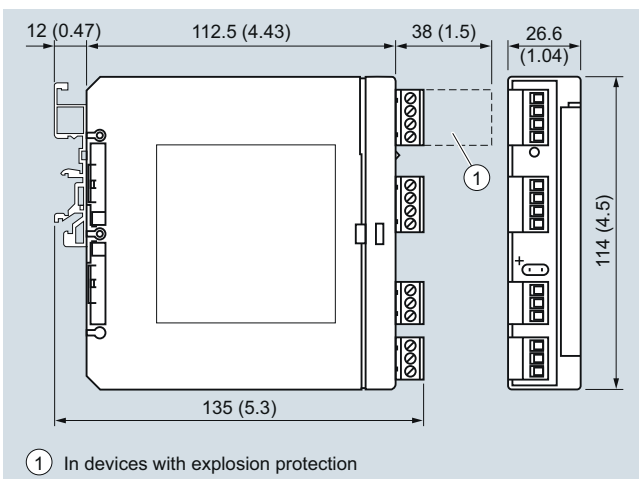

Dimensions for control room mounting, rail mounting in mm (inches)