

Level instruments

Continuous level measurement - Ultrasonic controllers

MultiRanger 100/200

Overview



MultiRanger is a versatile short to medium-range ultrasonic single and multi-vessel level monitor/controller for virtually any application in a wide range of industries.

Benefits

- Digital input for back-up level override from point level device
- Communication using built-in Modbus RTU via RS-485
- Compatible with SmartLinX system and SIMATIC PDM configuration software
- Single or dual point level monitoring
- Auto False-Echo Suppression for fixed obstruction avoidance
- Differential amplifier transceiver for common mode noise reduction and improved signal-to-noise ratio
- MultiRanger 100: level measurements, simple pump control and level alarm functions
- MultiRanger 200: level, volume and flow measurements in open channels, differential control, extended pump control and alarm functions
- Wall and panel mounting options

Application

MultiRanger can be used on different materials, including fuel oil, municipal waste, acids, woodchips or on materials with high angles of repose. MultiRanger offers true dual point monitoring, digital communications with built-in Modbus[®] RTU via RS-485, as well as compatibility with SIMATIC PDM, allowing PC configuration and setup. MultiRanger features Sonic Intelligence[®] advanced echo-processing software for increased reading reliability.

MultiRanger 100 offers cost-effective level alarming, as well as on/off and alternating pump control. MultiRanger 200 will monitor open channel flow and features more advanced relay alarming and pump control functions as well as volume conversion.

It is compatible with chemical-resistant Echomax[®] transducers that can be used in hostile environments at temperatures as high as +145 °C (+293 °F).

- Key Applications: wet wells, flumes/weirs, bar screen control, hoppers, chemical storage, liquid storage, crusher bins, dry solids storage

Design

The MultiRanger is available in wall or panel mounting options.

Level instruments

Continuous level measurement - Ultrasonic controllers

MultiRanger 100/200

Technical specifications

Mode of Operation

Measuring principle	Ultrasonic level measurement
Measuring range	0.3 to 15 m (1 to 50 ft)
Measuring points	1 or 2

Input

• Analog (MultiRanger 200 only)	0 to 20 mA or 4 to 20 mA, from alternate device, scalable
• Discrete	10 to 50 V DC switching level Logical 0 = < 0.5 V DC Logical 1 = 10 to 50 V DC Max. 3 mA

Output

• Echomax [®] transducer	44 kHz
• Ultrasonic transducer	Compatible transducers: ST-H and Echomax series XPS-10/10F, XPS 15/15F, XCT-8, XCT-12 and XRS-5
• Relays	Rating 5 A at 250 V AC, non-inductive
- Version with 1 relay (MultiRanger 100 only)	1 SPST Form A
- Version with 3 relays	2 SPST Form A/1 SPDT Form C
- Version with 6 relays	4 SPST Form A/2 SPDT Form C
• mA output	0 to 20 mA or 4 to 20 mA
- Max. load	750 Ω, isolated
- Resolution	0.1% of range

Accuracy

• Error in measurement	0.25% of range or 6 mm (0.24"), whichever is greater
• Resolution	0.1 % of measuring range ¹⁾ or 2 mm (0.08"), whichever is greater
• Temperature compensation	<ul style="list-style-type: none"> • -50 to +150 °C (-58 to +302 °F) • Integral temperature sensor • External TS-3 temperature sensor (optional) • Programmable fixed temperature values

Rated operating conditions

<u>Installation conditions</u>	
• Location	Indoor/outdoor
• Installation category	II
• Pollution degree	4
<u>Ambient conditions</u>	
• Ambient temperature (housing)	-20 to +50 °C (-4 to +122 °F)

Design

• Weight	
- Wall mount	1.37 kg (3.02 lbs)
- Panel mount	1.50 kg (3.31 lbs)
• Material (enclosure)	Polycarbonate
• Degree of protection (enclosure)	
- Wall mount	IP65/Type 4X/NEMA 4X
- Panel mount	IP54/Type 3/NEMA 3
<u>Electrical connection</u>	
• Transducer and mA output signal	2-core copper conductor, twisted, shielded, 0.5 to 0.75 mm ² (22 to 18 AWG), Belden [®] 8760 or equivalent is acceptable
• Max. separation between transducer and transceiver	365 m (1200 ft)

Displays and controls

	100 x 40 mm (4 x 1.5") multi-block LCD with backlighting
• Programming	Programming using hand-held programmer, SIMATIC PDM or via PC with Dolphin Plus software

Power supply

• AC version	100 to 230 V AC ± 15 %, 50/60 Hz, 36 VA (17 W)
• DC version	12 to 30 V DC (20 W)

Certificates and approvals

- CE, C-TICK²⁾
- Lloyd's Register of Shipping
- ABS Type Approval
- FM, CSA_{US/C}, UL listed
- CSA Class I, Div. 2, Groups A, B, C and D, Class II, Div.2, Groups F and G, Class III (wall mount only), ATEX II 3D

Communication

- RS-232 with Modbus RTU or ASCII via RJ-11 connector
- RS-485 with Modbus RTU or ASCII via terminal strips
- Optional: SmartLinX[®] cards for
 - PROFIBUS DP
 - DeviceNet[™]
 - Allen-Bradley[®] Remote I/O

¹⁾ Program range is defined as the empty distance to the face of the transducer plus any range extension

²⁾ EMC performance available on request

Level instruments

Continuous level measurement - Ultrasonic controllers

MultiRanger 100/200

Selection and Ordering data	Order No.
MultiRanger 100/200 Versatile short to medium-range ultrasonic single and multi-vessel level monitor/controller for virtually any application in a wide range of industries	L) 7ML5033- ■■■■■-■■■
Versions	
MultiRanger 100, level measurement only	1
MultiRanger 200, level, volume, flow and differential measurements	2
Mounting, enclosure design	
Wall mount, standard enclosure	A
Wall mount, 4 entries, 4 M20 cable glands included	B
Panel mount (CE, CSA _{USC} , FM, UL)	C
Power supply	
100 to 230 V AC	A
12 to 30 V DC	B
Number of measurement points	
Single point version	0
Dual point version	1
Communication (SmartLinx)	
Without module	0
SmartLinx® Allen-Bradley® Remote I/O module	1
SmartLinx PROFIBUS DP module	2
SmartLinx DeviceNet™ module	3
See SmartLinx product page 5/301 for more information.	
Output relays	
3 relays (2 Form A, 1 Form C), 250 V AC	1
6 relays (4 Form A, 2 Form C), 250 V AC	2
1 relay (1 Form A), 250 V AC (available on MultiRanger 100 model only)	3
Approvals	
General Purpose CE, FM, CSA _{USC} , UL listed, C-TICK	A
CSA Class I, Div. 2, Groups A, B, C and D; Class II, Div 2, Groups F and G; Class III ¹⁾	B
ATEX II 3D ²⁾	C
Further designs	Order code
Please add " -Z " to Order No. and specify Order code(s).	
Stainless steel tag [69 x 50 mm (2.71 x 1.97")]: Measuring-point number/identification (max. 16 characters) specify in plain text	Y15

Selection and Ordering data	Order No.
MultiRanger 100/200 Versatile short to medium-range ultrasonic single and multi-vessel level monitor/controller for virtually any application in a wide range of industries	L) 7ML5033- ■■■■■-■■■
Instruction manual	
English	C) 7ML1998-5FB06
French	C) 7ML1998-5FB13
Spanish	C) 7ML1998-5FB23
German	C) 7ML1998-5FB34
Quick Start guide, multi-language Note: The instruction manual should be ordered as a separate line on the order.	C) 7ML1998-5QD83
This device is shipped with the Siemens Milltronics manual CD containing the complete ATEX Quick Start and instruction manual library.	
Other instruction manuals	
SmartLinx Allen-Bradley Remote I/O, English	C) 7ML1998-1AP03
SmartLinx PROFIBUS DP, English	C) 7ML1998-1AQ03
SmartLinx PROFIBUS DP, German	C) 7ML1998-1AQ33
SmartLinx PROFIBUS DP, French	C) 7ML1998-1AQ12
SmartLinx DeviceNet, English Note: The appropriate SmartLinx instruction manual should be ordered as a separate line on the order.	C) 7ML1998-1BH02
Accessories	
Handheld programmer	7ML1830-2AK
Tag, stainless steel, 12 x 45 mm (0.47 x 1.77"), one text line, suitable for enclosure	7ML1930-1AC
TS-3 Temperature Sensor - see TS-3 on page 5/186	
SITRANS RD100 Remote display - see RD100 on page 5/304	
SITRANS RD200 Remote display - see RD200 on page 5/306	
Spare parts	
Power Supply Board (100 to 230 V AC)	C) 7ML1830-1MD
Power Supply Board (12 to 30 V DC)	C) 7ML1830-1ME
Display Board	C) 7ML1830-1MF
See SmartLinx product page 5/301 for more information.	

- 1) For wall mount applications only
2) For standard enclosure wall mount, option A only

C) Subject to export regulations AL: N, ECCN: EAR99
L) Subject to export regulations AL: N, ECCN: 3A991X

®Modbus is a registered trademark of Schneider Electric.

®Belden is a registered trademark of Belden Wire and Cable Company.

®Allen-Bradley is a registered trademark of Rockwell Automation.


™DeviceNet is a trademark of Open DeviceNet Vendor Association (ODVA)

Level instruments

Continuous level measurement - Ultrasonic controllers


MultiRanger 100/200

Dimensional drawings

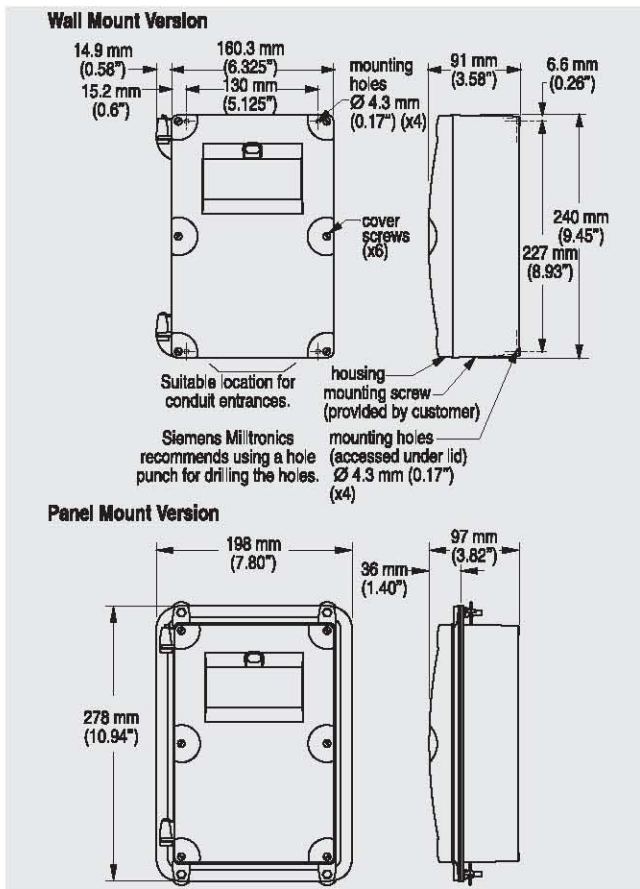

MultiRanger dimensions

Schematics

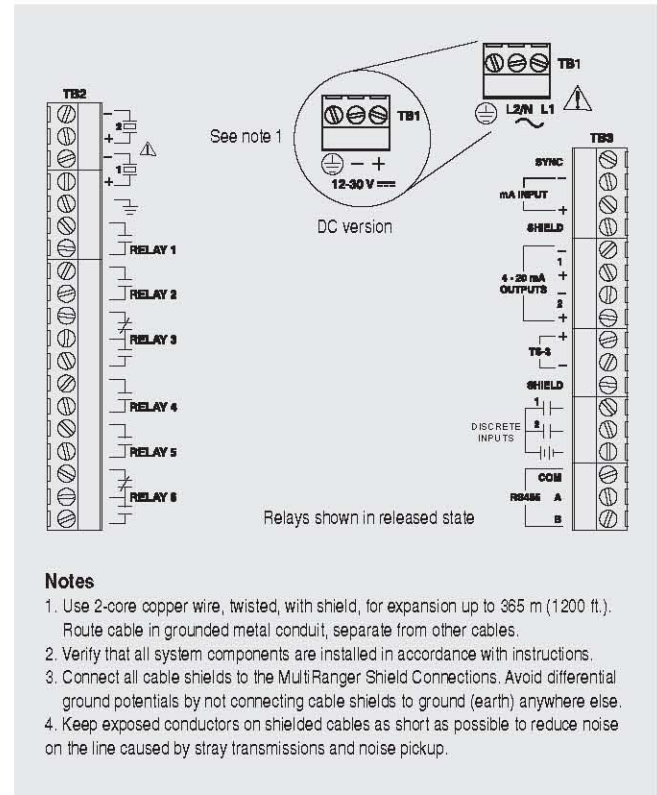

MultiRanger connections